RNAV (GPS) RWY 31

ATLANTA RGNL FALCON FLD (FFC)

WAAS	APP CRS	Rwy Ldg	5118
CH 72706	313°	TDZE	807
W31A		Apt Elev	808


RNP APCH.

Circling Rwy 13 NA at night. Rwy 31 helicopter visibility reduction below ¾ SM NA. Inop table does not apply to LPV. For inop ALS, increase LNAV/VNAV Cat A/B visibility to 1⅛ SM. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C or above 54°C.


ODALS

MISSED APPROACH: Climb to 1500 then climbing left turn to 3500 direct TIROE and hold.

ASOS	ATLANTA APP CON	CLNC DEL	UNICOM
118.525	119.8 354.125	119.8	123.05 (CTAF) L

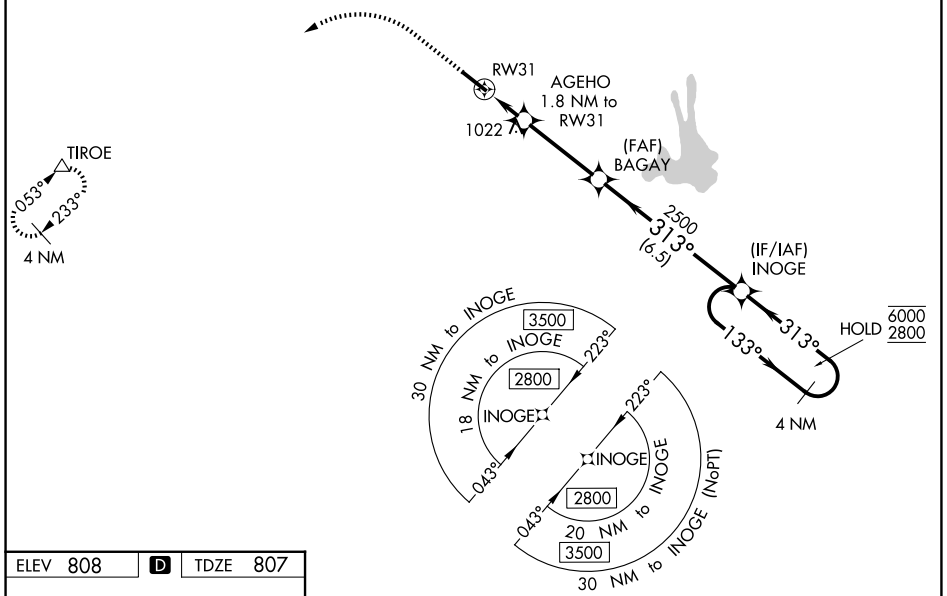


ELEV 808 D TDZE 807



REIL Rwy 13 L
MIRL Rwy 13-31 L

1500 3500 TIROE

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 45).

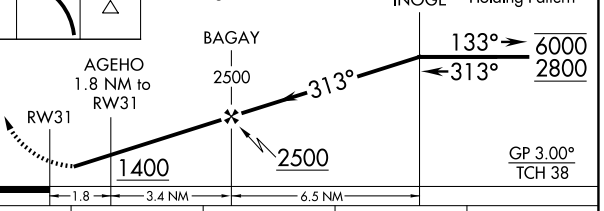

CATEGORY	A	B	C	D
LPV DA	1059-¾ 252 (300-¾)			
LNAV/VNAV DA	1188-1 381 (400-1)			
LNAV MDA	1280-¾ 473 (500-¾)		1280-1¼ 473 (500-1¼)	
CIRCLING	1320-1 512 (600-1)		1440-1¾ 632 (700-1¾)	1540-2¼ 732 (800-2¼)

SE-4, 29 OCT 2026 to 26 NOV 2026
SE-4, 29 OCT 2026 to 26 NOV 2026