RNAV (GPS) RWY 31

LANCASTER RGNL (LNC)


WAAS CH 42505 W31A	APP CRS 314°	Rwy Ldg 6500 TDZE 487 Apt Elev 501

RNP APCH - GPS.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Baro-VNAV NA when using RBD altimeter setting. When local altimeter setting not received, use RBD altimeter setting: increase LPV DA to 732 feet; increase LNAV/VNAV DA to 970 feet; increase all MDAs 60 feet and LNAV visibility Cat C ¼ SM, LNAV visibility Cat D ⅛ SM, and Circling visibility Cats C/D ¼ SM.

MISSED APPROACH: Climb to 2000 direct DOCAV and right turn on track 053° to WARER then climb to 3000 on track 053° to SOLDO and hold.


AWOS-3PT	LONE STAR APP CON	UNICOM
118.975	125.2 343.65	122.7 (CTAF) L

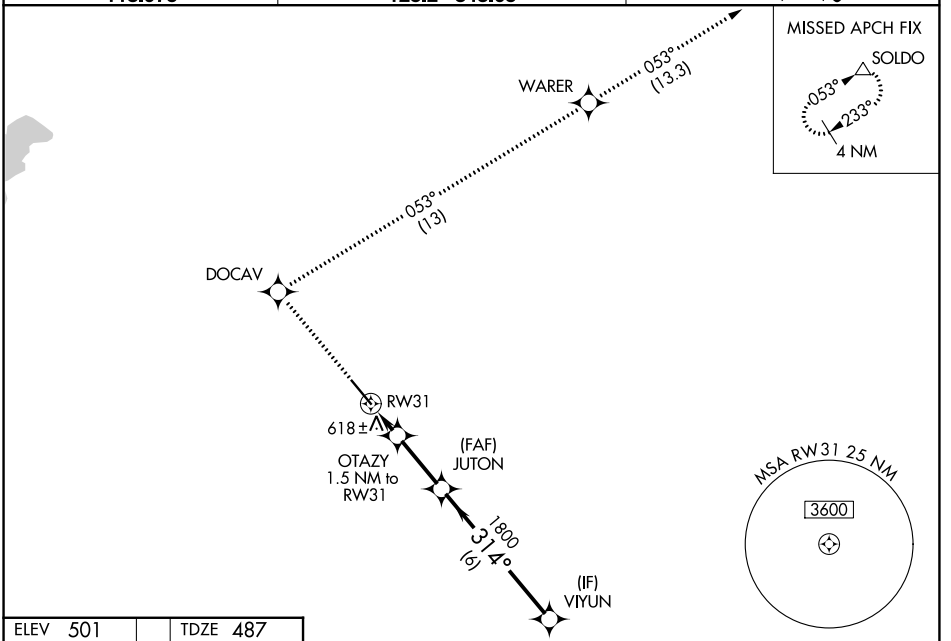

ELEV 501 TDZE 487



MIRL Rwy 13-31 L

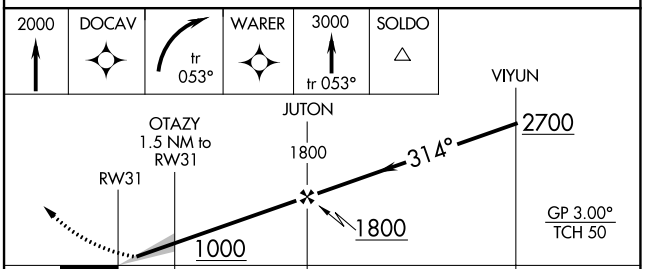

CATEGORY	A	B	C	D
LPV DA	687-¾ 200 (200-¾)			
LNAV/VNAV DA	925-1½ 438 (500-1½)			
LNAV MDA	880-1 393 (400-1)		880-1⅛ 393 (400-1⅛)	880-1¼ 393 (400-1¼)
CIRCLING	980-1 479 (500-1)	1020-1 519 (600-1)	1300-2¼ 799 (800-2¼)	1300-2½ 799 (800-2½)

SC-2, 29 OCT 2026 to 26 NOV 2026
SC-2, 29 OCT 2026 to 26 NOV 2026