WAAS	APP CRS	Rwy Ldg	4377
CH 53433	230°	TDZE	18
W23A		Apt Elev	18


RNAV (GPS) RWY 23


VENICE MUNI (VNC)

When local altimeter setting not received, use Sarasota altimeter setting and increase all MDA 60 feet and increase LP and LNAV Cats C, D visibility ⅛ mile, and Circling Cat C visibility ¼ mile. DME/DME RNP-0.3 NA. VDP NA with Sarasota altimeter setting. Helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 2900 direct WUPOS and hold.


AWOS-3	TAMPA APP CON	UNICOM
119.275	119.65 353.575	122.725 (CTAF) L

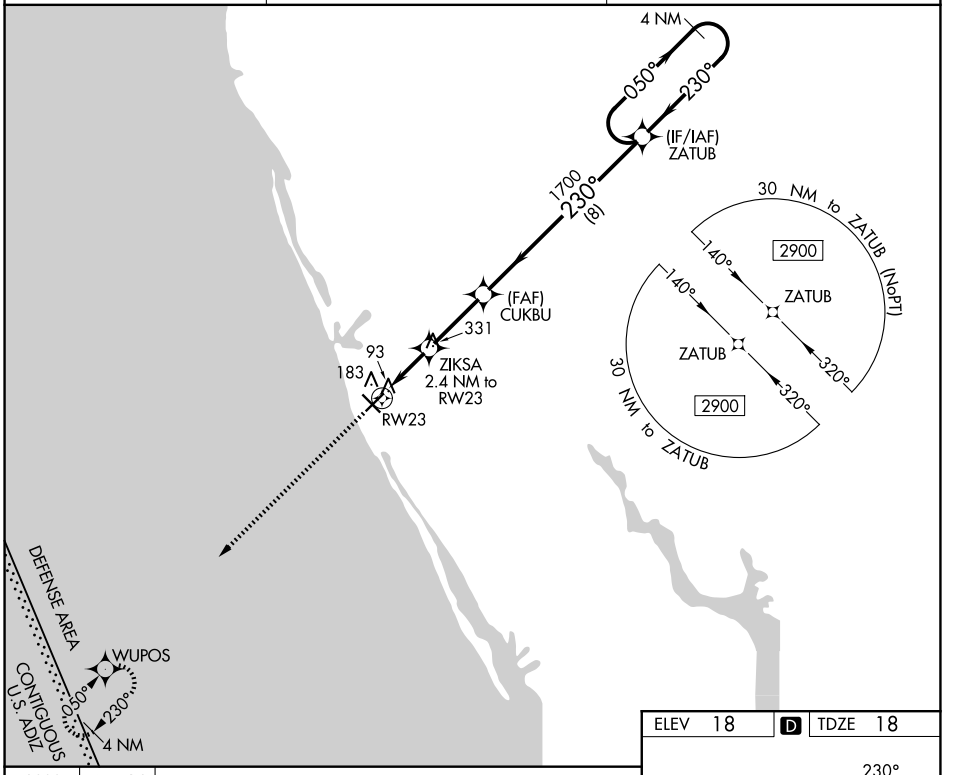

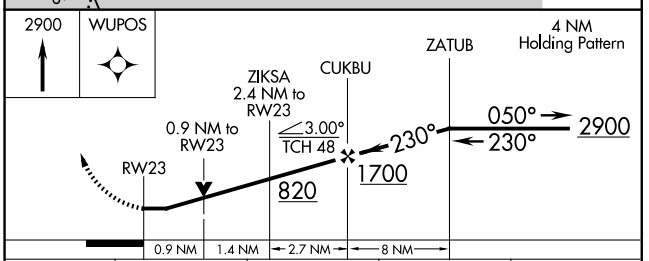

CATEGORY	A	B	C	D
LP MDA	360-1 342 (400-1)			
LNAV MDA	440-1 422 (500-1)		440-1¼ 422 (500-1¼)	
CIRCLING	500-1 482 (500-1)		700-2 682 (700-2)	920-3 902 (1000-3)

ELEV 18 D TDZE 18



MIRL Rwys 5-23 and 13-31 L
REIL Rwys 5, 13 and 23 L
REIL Rwy 31

SE-3, 29 OCT 2026 to 26 NOV 2026
SE-3, 29 OCT 2026 to 26 NOV 2026