WAAS	APP CRS	Rwy Ldg	5000
CH 69234	050°	TDZE	17
W05A		Apt Elev	18


RNAV (GPS) RWY 5

VENICE MUNI (VNC)


When local altimeter setting not received, use Sarasota altimeter setting and increase all MDA 60 feet, increase LNAV Cat C, D visibility ⅛ mile, and Circling Cat C visibility ¼ mile. DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 2900 direct ZATUB and hold.


AWOS-3	TAMPA APP CON	UNICOM
119.275	119.65 353.575	122.725 (CTAF) L

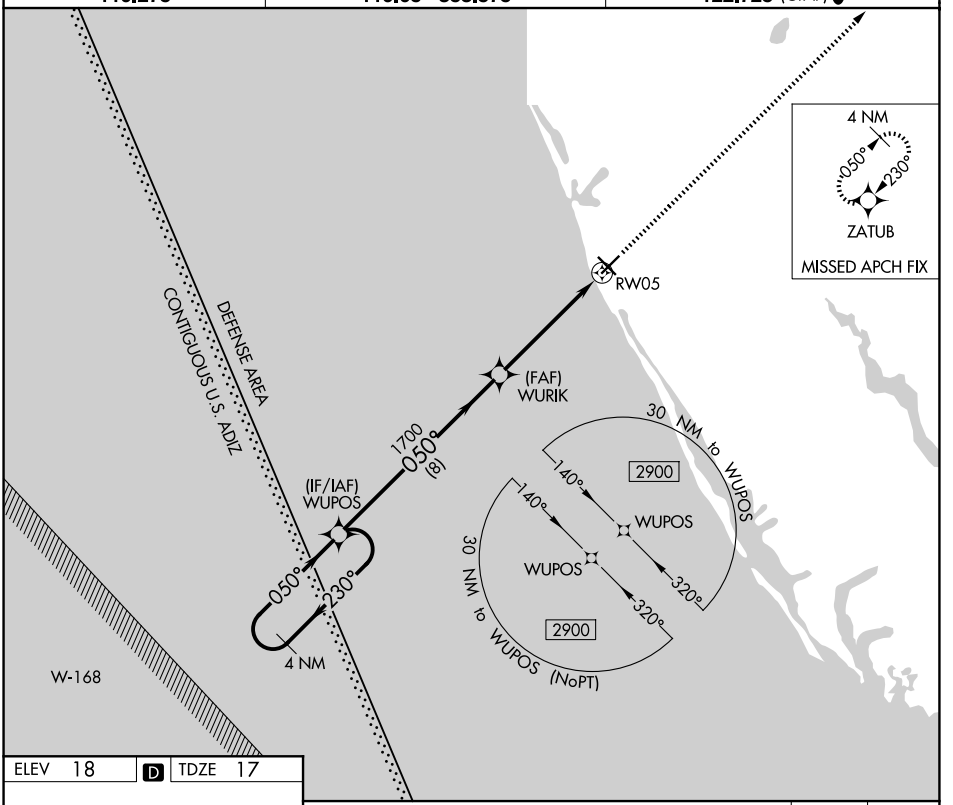

ELEV 18 D TDZE 17



MIRL Rwys 5-23 and 13-31 L
REIL Rwys 5, 13 and 23 L
REIL Rwy 31

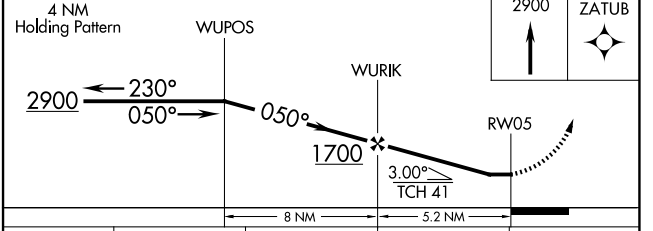

CATEGORY	A	B	C	D
LP MDA	460-1	443 (500-1)	460-1 3/8	443 (500-1 3/8)
LNAV MDA	480-1	463 (500-1)	480-1 3/8	463 (500-1 3/8)
CIRCLING	500-1	482 (500-1)	700-2 682 (700-2)	920-3 902 (1000-3)

SE-3, 29 OCT 2026 to 26 NOV 2026
SE-3, 29 OCT 2026 to 26 NOV 2026