| WAAS | APP CRS | Rwy Ldg 5402 |
|---|---|---|
| CH 72937 | 339° | TDZE 204 |
| W34A | | Apt Elev 207 |


# RNAV (GPS) RWY 34

## HANOVER COUNTY MUNI (OFP)


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C (13°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Richmond Intl altimeter setting and increase all DA 37 feet and all MDA 40 feet; increase LNAV/VNAV all Cats and LNAV Cats C/D visibility ⅛ mile. Baro-VNAV and VDP NA when using Richmond Intl altimeter setting.

MISSED APPROACH: Climb to 700 then climb to 2000 direct COATT and hold.


| ASOS | POTOMAC APP CON | CLNC DEL | UNICOM |
|---|---|---|---|
| 119.025 | (001°-185°) 126.4 307.2<br>(186°-360°) 126.75 307.2 | 125.4 | 122.7 (CTAF) L |

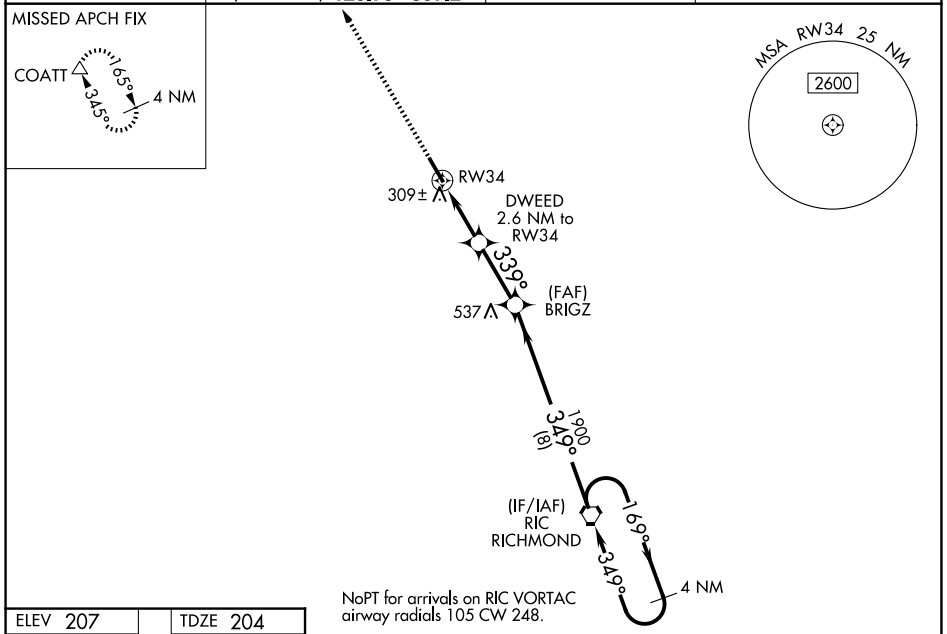


ELEV 207 TDZE 204

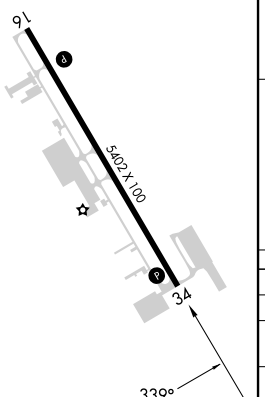


REIL Rwys 16 and 34 L
HIRL Rwy 16-34 L

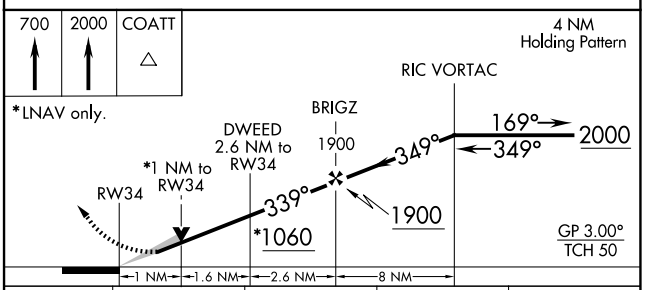


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | | 454-1 | 250 (300-1) | |
| LNAV/VNAV DA | | 493-1 | 289 (300-1) | |
| LNAV MDA | | 560-1 | 356 (400-1) | |
| CIRCLING | 660-1 453 (500-1) | | 900-2 693 (700-2) | 1020-2¾ 813 (900-2¾) |



NE-3, 29 OCT 2026 to 26 NOV 2026
NE-3, 29 OCT 2026 to 26 NOV 2026