RNAV (GPS) RWY 36

AUGUSTA MUNI (3AU)


WAAS CH 63027 W36A	APP CRS 360°	Rwy Ldg 4501 TDZE 1324 Apt Elev 1326


RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Baro-VNAV NA when using AAO altimeter setting. When local altimeter setting not received, use AAO altimeter setting and increase LPV DA to 1557 feet; increase LNAV/VNAV DA to 1607 feet. Increase all MDAs 40 feet and LNAV visibility Cat C ⅛ SM.

MISSED APPROACH: Climb to 4500 direct GOLUW and on track 347° to INDIC and hold.

AWOS-3P	WICHITA APP CON	CLNC DEL	UNICOM
124.175	134.8 269.1	125.0	122.8 (CTAF) L

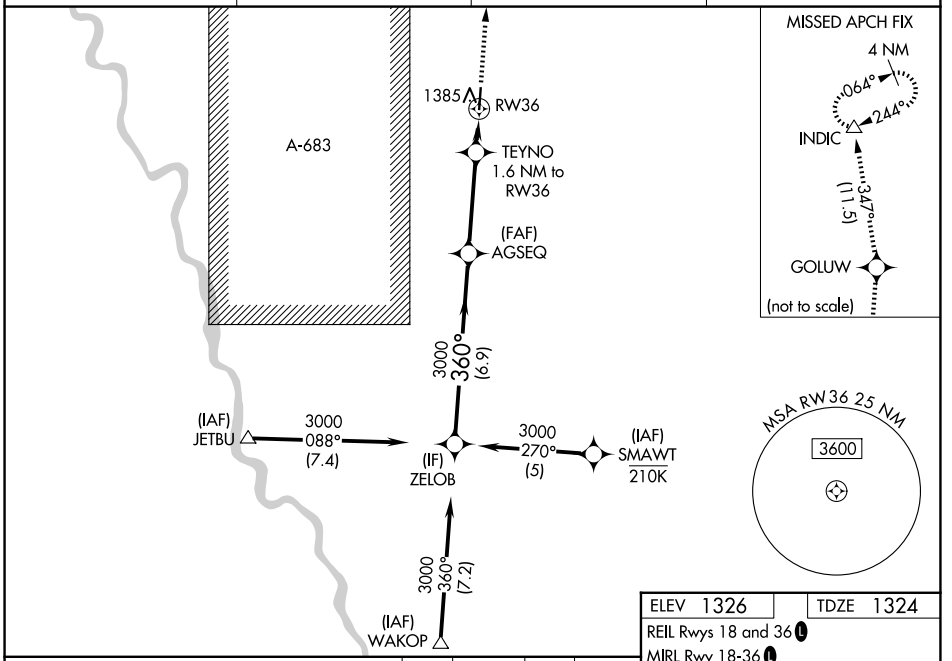

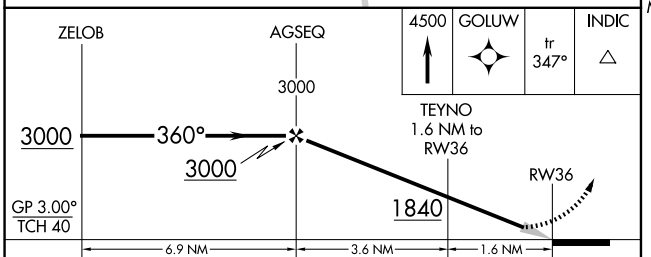


CATEGORY	A	B	C	D
LPV DA	1524-1 200 (200-1)			NA
LNAV/VNAV DA	1574-1 250 (300-1)			NA
LNAV MDA	1700-1 376 (400-1)			NA
CIRCLING	1800-1 474 (500-1)	1820-1 494 (500-1)	1820-1½ 494 (500-1½)	NA

ELEV 1326 TDZE 1324

REIL Rwys 18 and 36 L

MIRL Rwy 18-36 L

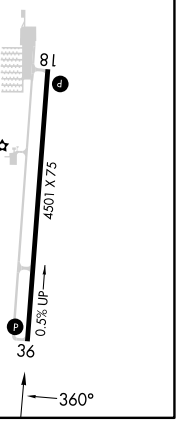

NC-2, 29 OCT 2026 to 26 NOV 2026
NC-2, 29 OCT 2026 to 26 NOV 2026