WAAS	APP CRS	Rwy Ldg	5001
CH 40328	251°	TDZE	781
W25A		Apt Elev	781


RNAV (GPS) RWY 25

ROCHELLE MUNI/KORITZ FLD (RPJ)


Baro-VNAV NA when using Chicago/Rockford Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Chicago/Rockford Intl altimeter setting: increase LPV DA to 1079 feet and LNAV/VNAV DA to 1152 feet and all MDA 60 feet; increase LNAV/VNAV visibility all Cats and LNAV Cat C/D visibility ⅛ mile; increase Circling Cat C visibility ¼ mile. Helicopter visibility reduction below ¾ SM NA. VDP NA when using Chicago/Rockford Intl altimeter setting.


MISSED APPROACH: Climb to 2600 direct BATBE and hold.

AWOS-3	ROCKFORD APP CON	UNICOM
125.2	126.0 327.0	122.975 (CTAF) L

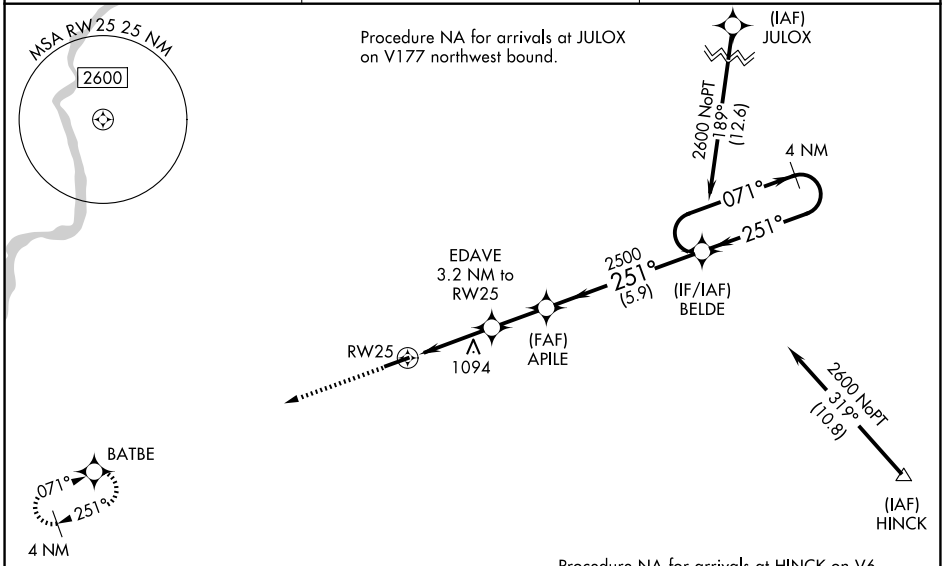

ELEV 781 TDZE 781



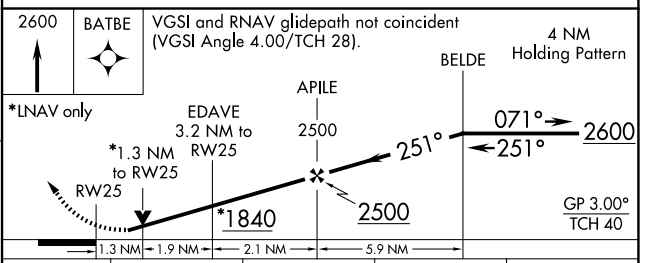

CATEGORY	A	B	C	D
LPV DA	1031-1 250 (300-1)			
LNAV/VNAV DA	1104-1⅛ 323 (400-1⅛)			
LNAV MDA	1360-1 579 (600-1)		1360-1⅝ 579 (600-1⅝)	
CIRCLING	1360-1 579 (600-1)		1680-2¾ 899 (900-2¾)	1820-3 1039 (1100-3)

MIRL Rwy 7-25 L
REIL Rwys 7 and 25 L

EC-3, 29 OCT 2026 to 26 NOV 2026
EC-3, 29 OCT 2026 to 26 NOV 2026