WAAS	APP CRS	Rwy Ldg	5002
CH 66005	066°	TDZE	2275
W07A		Apt Elev	2275


RNAV (GPS) RWY 7


SOMERSET COUNTY (2G9)

NA — Baro-VNAV and VDP NA when using Johnstown altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C (-2°F) or above 53°C (128°F). DME/DME RNP-0.3 NA. Circling Rwy 25 NA at night. Circling to Rwy 14-32 NA. When local altimeter setting not received, use Johnstown altimeter setting and increase all DA 44 feet and all MDA 60 feet. Increase LPV all Cats visibility ⅛ mile and LNAV/VNAV all Cats visibility ¼ mile.

MISSED APPROACH: Climb to 5200 direct IZYUR and hold.


AWOS-3P	JOHNSTOWN APP CON ★	UNICOM
133.8	121.2 299.2	122.8 (CTAF) L

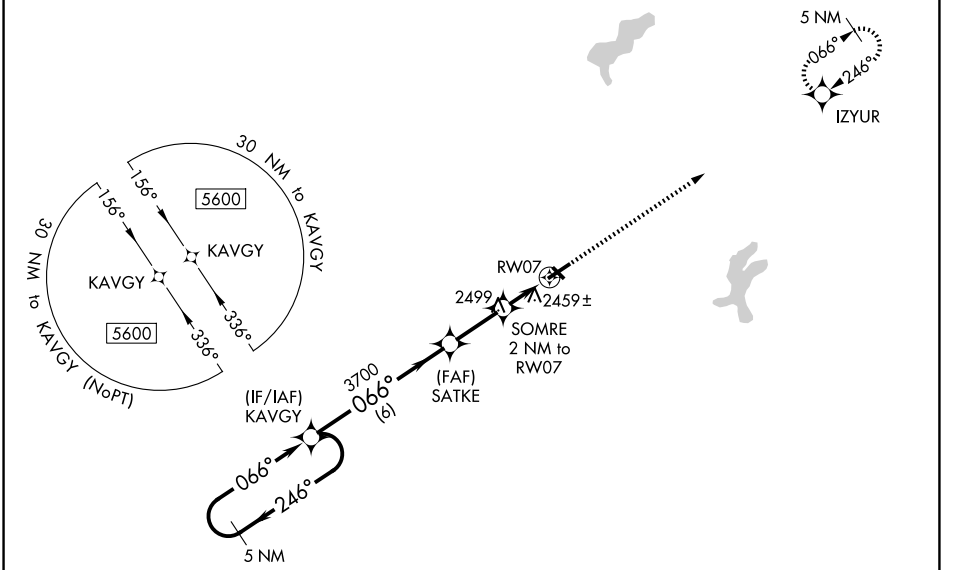

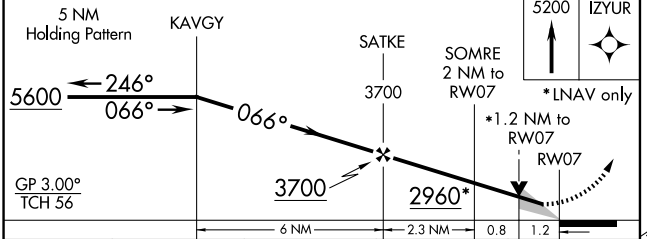

CATEGORY	A	B	C	D
LPV DA	2525-1		250 (300-1)	
LNAV/VNAV DA	2640-1⅛		365 (400-1⅛)	
LNAV MDA	2720-1	445 (500-1)	2720-1⅜	445 (500-1⅜)
CIRCLING	2820-1 545 (600-1)	2920-1 645 (700-1)	3460-3 1185 (1200-3)	3520-3 1245 (1300-3)

ELEV 2275 TDZE 2275



MIRL Rwy 7-25
REIL Rwys 7 and 25 L

NE-4, 29 OCT 2026 to 26 NOV 2026
NE-4, 29 OCT 2026 to 26 NOV 2026