RNAV (GPS) RWY 16

PELLA MUNI (PEA)


WAAS	APP CRS	Rwy Ldg	5003
CH 77610	165°	TDZE	885
W16A		Apt Elev	885


RNP APCH - GPS.


Rwy 16 helicopter visibility reduction below ¾ SM NA. Baro-VNAV and VDP NA when using OXV altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use OXV altimeter setting: increase LPV DA to 1261 feet; increase LNAV/VNAV DA to 1317 feet; increase all MDAs 40 feet and Circling visibility Cat C ¼ SM.

MISSED APPROACH: Climb to 3000 direct OFKEQ and hold.

AWOS-3	DES MOINES APP CON	UNICOM
118.875	123.9 307.15	122.8 (CTAF) L

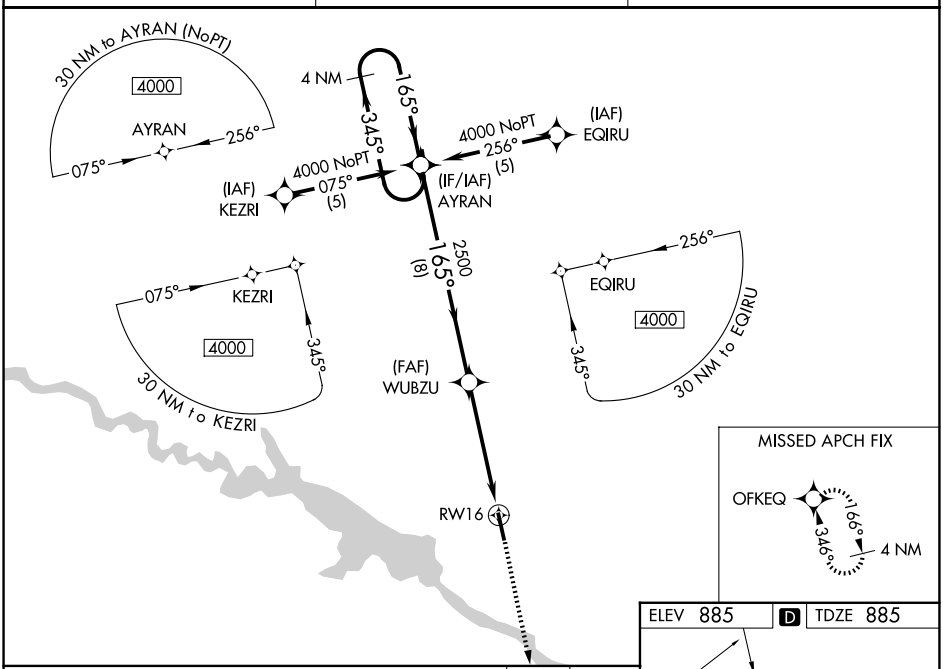

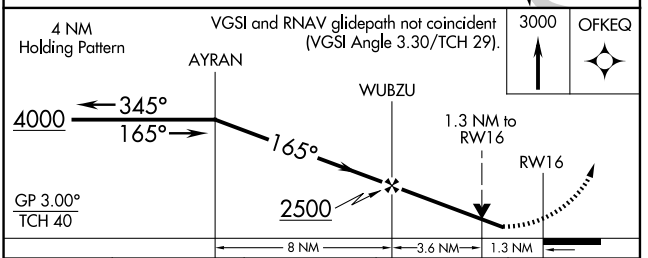

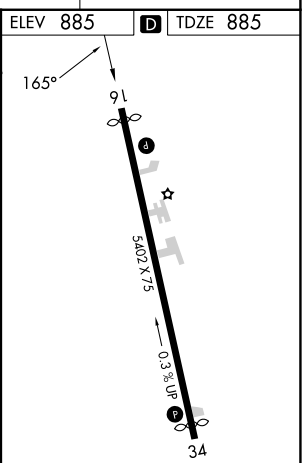

CATEGORY	A	B	C	D
LPV DA	1232-1¼ 347 (400-1¼)			NA
LNAV/VNAV DA	1288-1½ 403 (500-1½)			NA
LNAV MDA	1360-1 475 (500-1)		1360-1⅜ 475 (500-1⅜)	NA
CIRCLING	1380-1 495 (500-1)	1420-1 535 (600-1)	1480-1½ 595 (600-1½)	NA

MIRL Rwy 16-34 L
REIL Rwys 16 and 34 L

NC-3, 29 OCT 2026 to 26 NOV 2026
NC-3, 29 OCT 2026 to 26 NOV 2026