RNAV (RNP) Z RWY 31L


DALLAS-FORT WORTH INTL (DFW)

APP CRS	Rwy Ldg	TDZE	Apt Elev
315°	9300	581	607

For uncompensated Baro-VNAV systems, procedure NA below -4°C (25°F) or above 54°C (130°F). Simultaneous approach authorized with Rwy 31R. GPS Required. Use of FD or AP providing RNAV track guidance required during simultaneous operations.


MISSED APPROACH: Climb to 3000 on track 315° to HODAX and on track 306° to KAGLE and hold.

D-ATIS	LONE STAR APP CON	DFW TOWER	GND CON
123.775	118.425 127.075 119.4	126.55 127.5 (E) 124.15 134.9 (W)	121.65 121.8 (E) 121.85 (W)

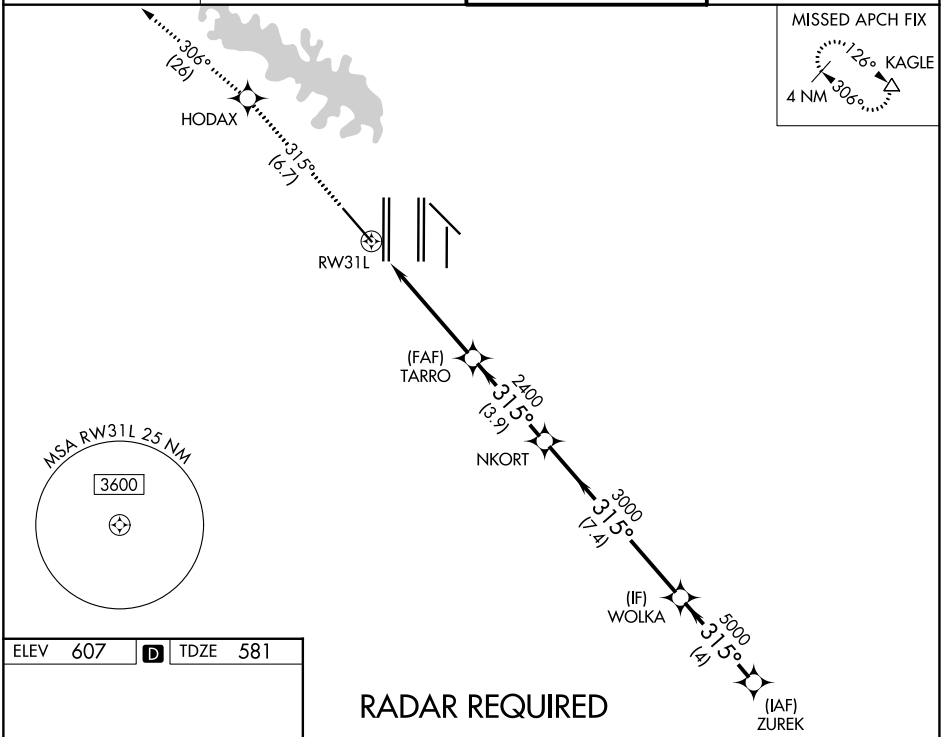

ELEV 607 | D | TDZE 581


RADAR REQUIRED



HIRL all Rwys
REIL Rwys 13L and 31L
TDZL/RCLS all Rwys except 13L and 31L

3000	HODAX	tr 306°	KAGLE
tr 315°			

VGSI and RNAV glidepath not coincident (VGSI Angle 3.13/TCH 72).

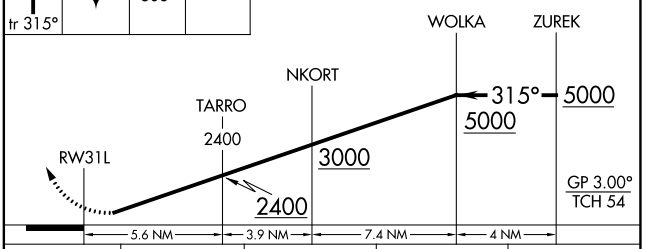

CATEGORY	A	B	C	D
RNP 0.30 DA	951/60	370 (400-1¼)		

AUTHORIZATION REQUIRED

SC-2, 29 OCT 2026 to 26 NOV 2026
SC-2, 29 OCT 2026 to 26 NOV 2026