RNAV (GPS) Y RWY 13R

DALLAS-FORT WORTH INTL (DFW)

WAAS	APP CRS	Rwy Ldg	9300
CH 72742	135°	TDZE	591
W13A		Apt Elev	606

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -8° C or above 54° C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 6000 and LNAV Cat C/D visibility to 1⅜ SM.

MALSR

MISSED APPROACH: Climb to 1100 then climbing right turn to 3000 direct SLOTT and hold.

D-ATIS	LONE STAR APP CON	DFW TOWER	GND CON
123.775	133.15 118.1	126.55 127.5 (E) 124.15 134.9 (W)	121.65 121.8 (E) 121.85 (W)


MISSED APCH FIX

4 NM

095°

275°


SLOTT

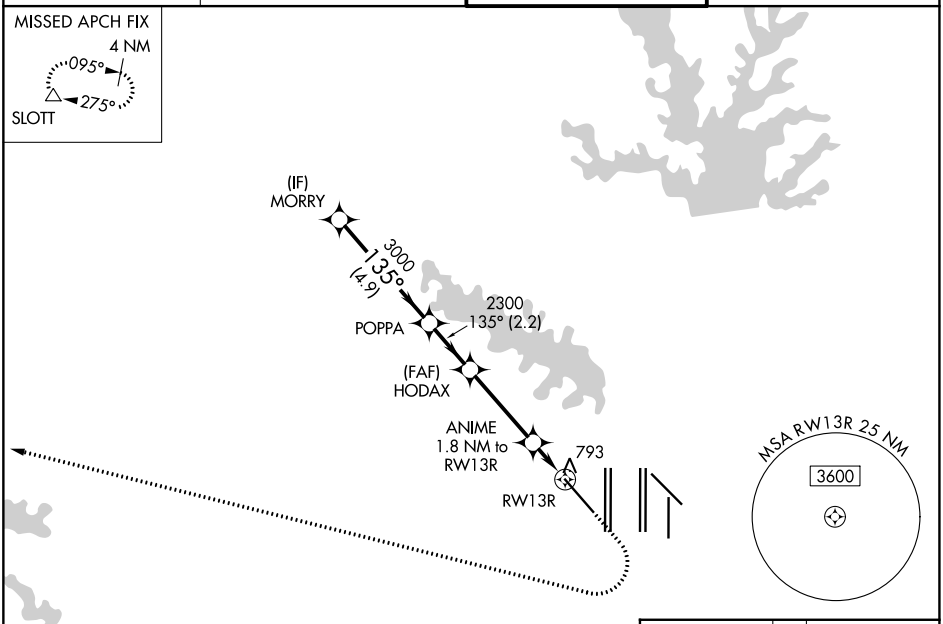


ELEV 606 D TDZE 591

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 71).

1100 3000 SLOTT

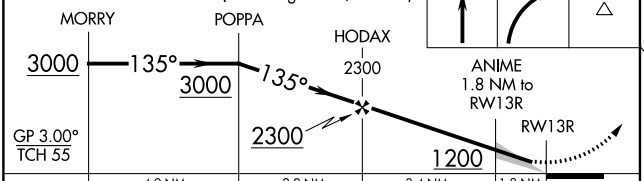

CATEGORY	A	B	C	D
LPV DA	791/18 200 (200-½)			
LNAV/VNAV DA	991/35 400 (400-⅝)			
LNAV MDA	1080/24 489 (500-½)		1080/50 489 (500-1)	



HIRL all Rwys
REIL Rwys 13L and 31L
TDZL/RCLS all Rwys except 13L and 31L

SC-2, 29 OCT 2026 to 26 NOV 2026
SC-2, 29 OCT 2026 to 26 NOV 2026