WAAS	APP CRS	Rwy Ldg	5003
CH 56238	276°	TDZE	975
W28A		Apt Elev	994

RNAV (GPS) RWY 28


ROBEN-HOOD (RQB)


RNP APCH - GPS.


T A Rwy 28 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Baro-VNAV and VDP NA when using MKG altimeter setting. When local altimeter setting not received, use MKG altimeter setting: increase LPV DA to 1383 feet and all visibilities ⅛ SM; increase LNAV/VNAV DA to 1598 feet and all visibilities ⅜ SM; increase all MDAs 160 feet.

MISSED APPROACH: Climb to 3000 direct JADIT and hold.

AWOS-3P	MINNEAPOLIS CENTER	UNICOM
125.875	120.85 322.35	122.8 (CTAF) L

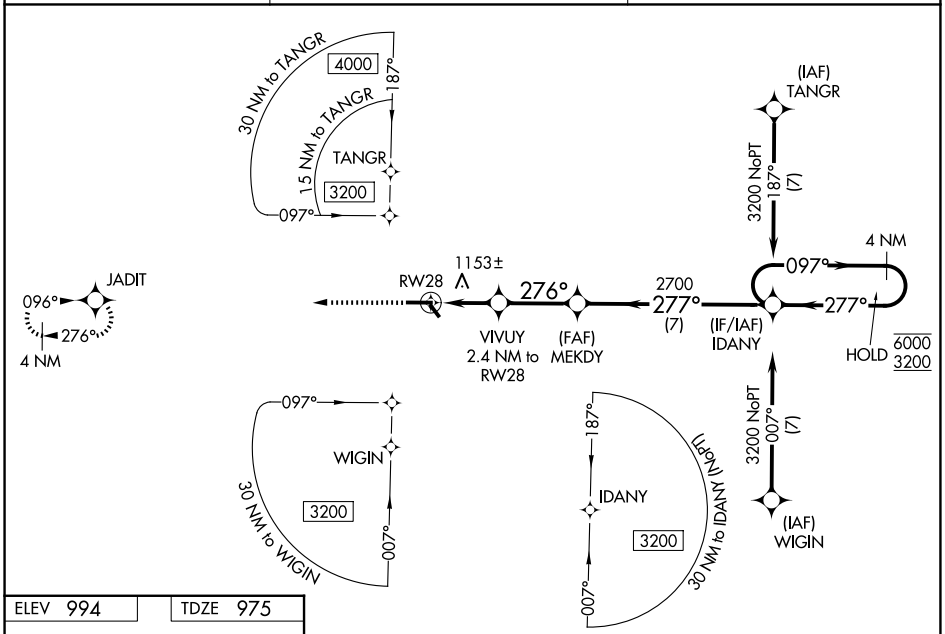



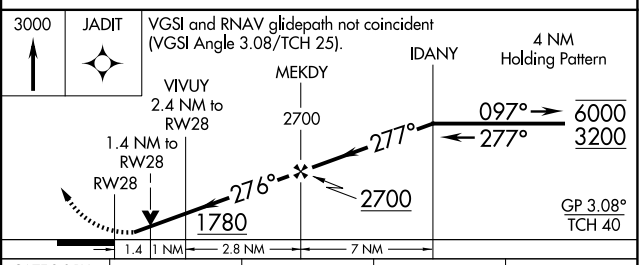

CATEGORY	A	B	C	D
LPV DA	1225-1	250 (300-1)	NA	
LNAV/VNAV DA	1440-1⅜	465 (500-1⅜)	NA	
LNAV MDA	1440-1	465 (500-1)	NA	
CIRCLING	1520-1 526 (600-1)	1560-1 566 (600-1)	NA	

REIL Rwys 10 and 28 L
MIRL Rwys 10-28 and 14-32 L

EC-1, 29 OCT 2026 to 26 NOV 2026
EC-1, 29 OCT 2026 to 26 NOV 2026