RNAV (GPS) RWY 33

MADISON MUNI (MDS)


WAAS	APP CRS	Rwy Ldg	5000
CH 58321	330°	TDZE	1713
W33A		Apt Elev	1718

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 33°C. Rwy 33 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Brookings altimeter setting: increase LPV DA to 2021 feet; increase LNAV/VNAV DA to 2071 feet and all visibilities ¼ SM; increase all MDAs 60 feet and visibility LNAV and Circling Cats C and D ¼ SM. Circling NA to Rwys 3 and 21. Baro-VNAV NA when using Brookings altimeter setting.

MISSED APPROACH: Climb to 3400 direct YISRU and hold.

AWOS-3	MINNEAPOLIS CENTER	GCO	UNICOM
118.35	132.05 317.4	121.725	122.8 (CTAF) L

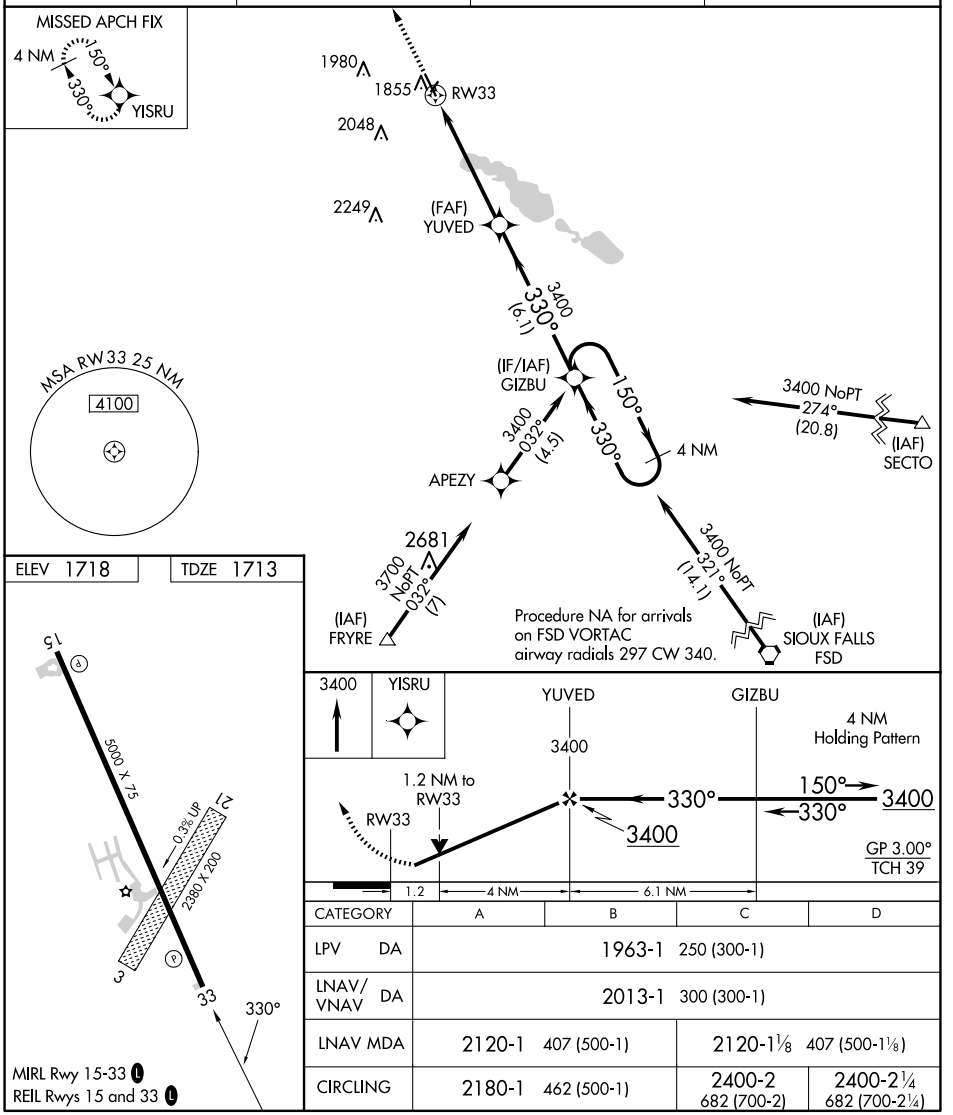

MIRL Rwy 15-33 L

REIL Rwys 15 and 33 L

CATEGORY	A	B	C	D
LPV DA	1963-1 250 (300-1)			
LNAV/VNAV DA	2013-1 300 (300-1)			
LNAV MDA	2120-1 407 (500-1)		2120-1⅛ 407 (500-1⅛)	
CIRCLING	2180-1 462 (500-1)		2400-2 682 (700-2)	2400-2¼ 682 (700-2¼)

NC-1, 29 OCT 2026 to 26 NOV 2026
NC-1, 29 OCT 2026 to 26 NOV 2026