RNAV (GPS) RWY 16


AURORA MUNI/AL POTTER FLD (AUH)

WAAS	APP CRS	Rwy Ldg	4301
CH 77809	163°	TDZE	1803
W16A		Apt Elev	1803

T A Baro-VNAV NA when using Grand Island altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Grand Island altimeter setting and increase all DA 41 feet and all MDA 60 feet and LPV all Cats visibility ¼ mile. VDP NA when using Grand Island altimeter setting.

MISSED APPROACH: Climb to 3400 direct EBWIX and hold.

AWOS-3	MINNEAPOLIS CENTER	UNICOM
121.225	119.4 278.8	122.8 (CTAF) L

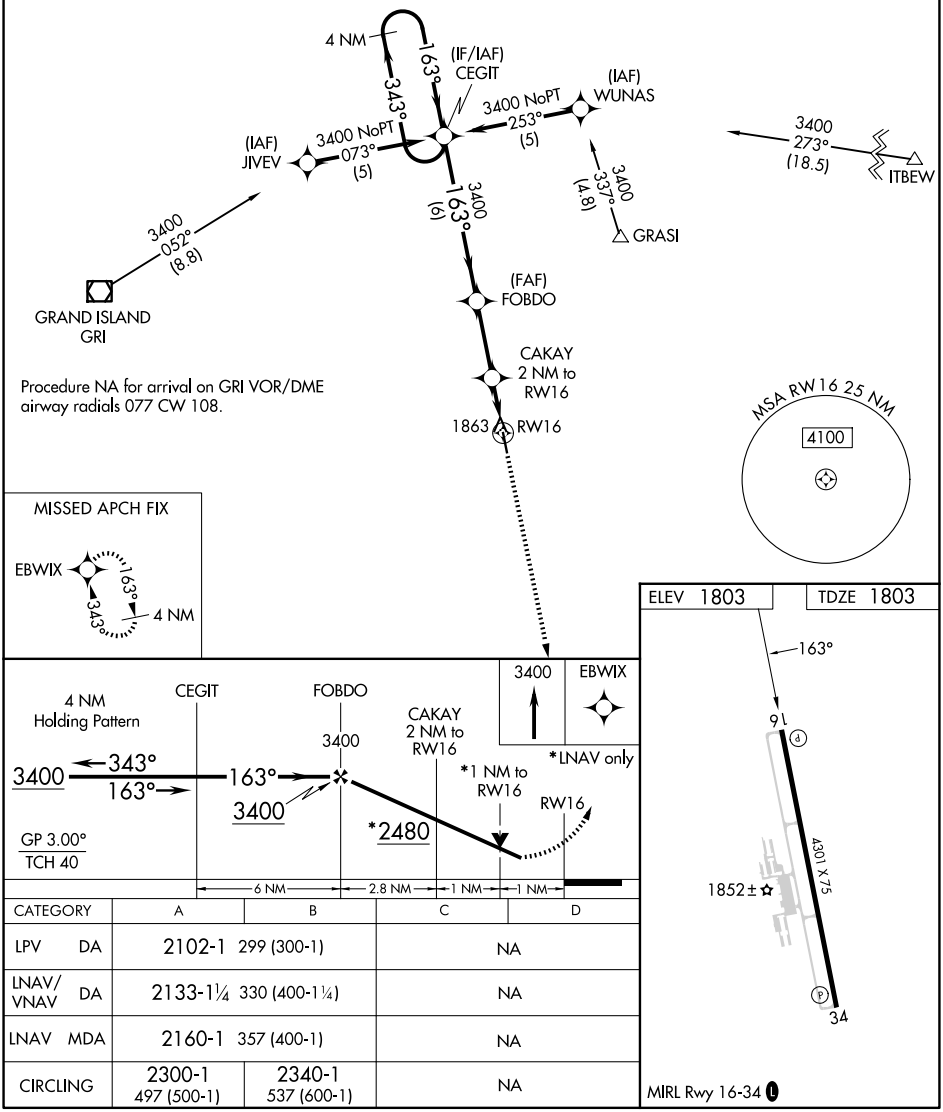

CATEGORY	A	B	C	D
LPV DA	2102-1 299 (300-1)		NA	
LNAV/VNAV DA	2133-1¼ 330 (400-1¼)		NA	
LNAV MDA	2160-1 357 (400-1)		NA	
CIRCLING	2300-1 497 (500-1)	2340-1 537 (600-1)	NA	

NC-2, 29 OCT 2026 to 26 NOV 2026
NC-2, 29 OCT 2026 to 26 NOV 2026