WAAS	APP CRS	Rwy Ldg	4301
CH 87009	343°	TDZE	1801
W34A		Apt Elev	1803


RNAV (GPS) RWY 34

AURORA MUNI/AL POTTER FLD (AUH)

T A Baro-VNAV NA when using Grand Island altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Grand Island altimeter setting and increase all DA 41 feet and all MDA 60 feet. VDP NA when using Grand Island altimeter setting.

MISSED APPROACH: Climb to 3400 direct CEGIT and hold.

AWOS-3	MINNEAPOLIS CENTER	UNICOM
121.225	119.4 278.8	122.8 (CTAF) L

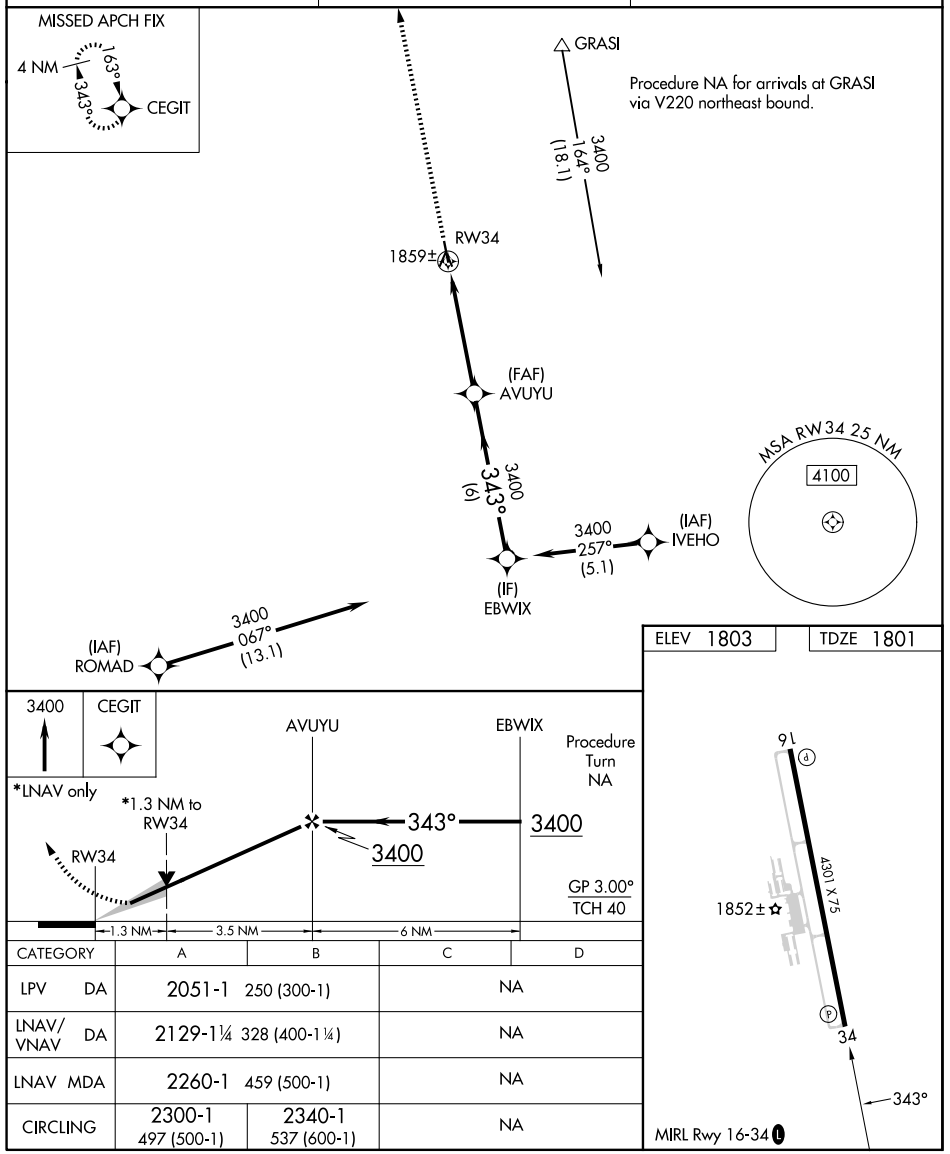

CATEGORY	A	B	C	D
LPV DA	2051-1 250 (300-1)		NA	
LNAV/VNAV DA	2129-1¼ 328 (400-1¼)		NA	
LNAV MDA	2260-1 459 (500-1)		NA	
CIRCLING	2300-1 497 (500-1)	2340-1 537 (600-1)	NA	

NC-2, 29 OCT 2026 to 26 NOV 2026
NC-2, 29 OCT 2026 to 26 NOV 2026