WAAS CH 82204 W18A	APP CRS 181°	Rwy Ldg 5501 TDZE 999 Apt Elev 1004


RNAV (GPS) RWY 18


KANSAS CITY/LEE'S SUMMIT RGNL (LXT)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). Rwy 18 helicopter visibility reduction below ¾ SM NA. DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using Kansas City Downtown/Wheeler Fld altimeter setting. When local altimeter setting not received, use Kansas City Downtown/Wheeler Fld altimeter setting: increase LPV DA to 1317 feet and all visibilities ⅛ SM; increase LNAV/VNAV DA to 1434 feet and all visibilities ¼ SM; increase all MDA 80 feet and LNAV visibility Cat C and D ⅜ SM, Circling Cats C and D ¼ SM.


MISSED APPROACH: Climb to 3000 direct WOMPO and hold.

ASOS	KANSAS CITY APP CON	UNICOM
124.175	118.4 307.35	122.8 (CTAF) L

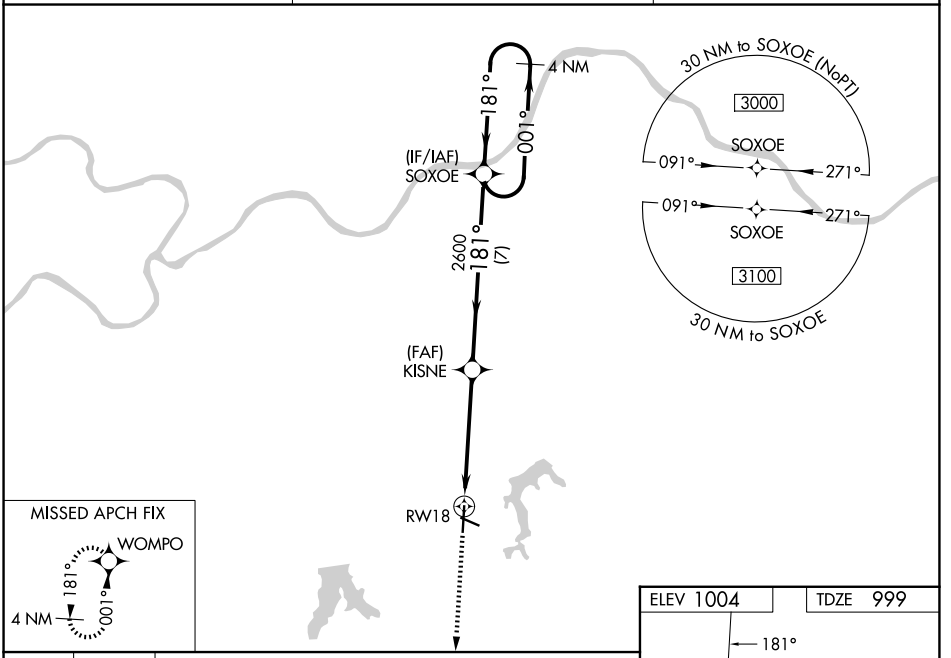

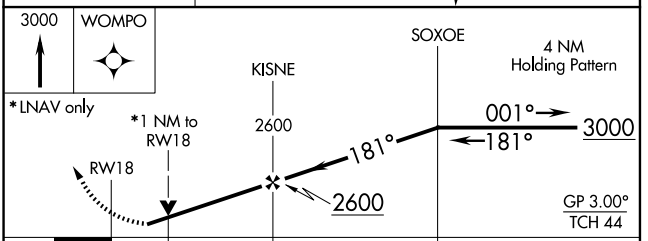

CATEGORY	A	B	C	D
LPV DA	1249-¾ 250 (300-¾)			
LNAV/VNAV DA	1366-1 367 (400-1)			
LNAV MDA	1360-1 361 (400-1)			
CIRCLING	1440-1 436 (500-1)	1540-1 536 (600-1)	1780-2¼ 776 (800-2¼)	1780-2½ 776 (800-2½)

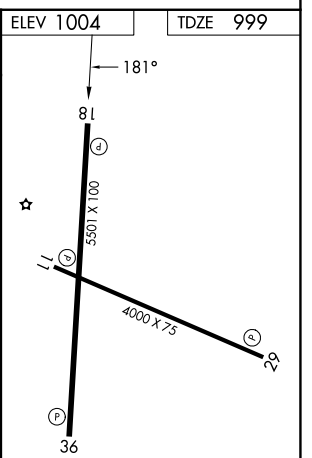

REIL Rwys 11, 18, 29 and 36 L
MIRL Rwys 11-29 and 18-36 L

NC-3, 29 OCT 2026 to 26 NOV 2026
NC-3, 29 OCT 2026 to 26 NOV 2026