RNAV (GPS) RWY 36


KANSAS CITY/LEE'S SUMMIT RGNL (LXT)


WAAS	APP CRS	Rwy Ldg	5501
CH 48805	001°	TDZE	997
W36A		Apt Elev	1004

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). Rwy 36 helicopter visibility reduction below ¾ SM NA. DME/DME RNP-0.3 NA. VDP and Baro-VNAV NA when using Kansas City Downtown/Wheeler Fld altimeter setting. When local altimeter setting not received, use Kansas City Downtown/Wheeler Fld altimeter setting: increase LPV DA to 1374 feet and all visibilities ⅛ SM; increase LNAV/VNAV to 1367 feet and all visibilities ⅛ SM; increase all MDA 80 feet and LNAV visibility Cats C and D ⅛ SM, Circling Cats C and D ¼ SM.

MISSED APPROACH: Climb to 3000 direct SOXOE and hold.

ASOS	KANSAS CITY APP CON	UNICOM
124.175	118.4 307.35	122.8 (CTAF) L

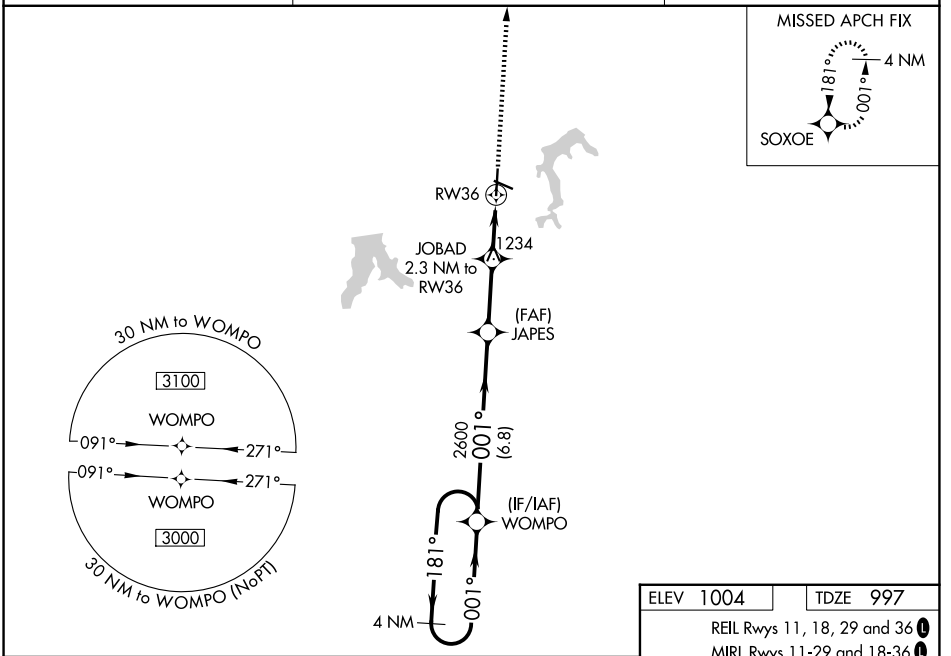

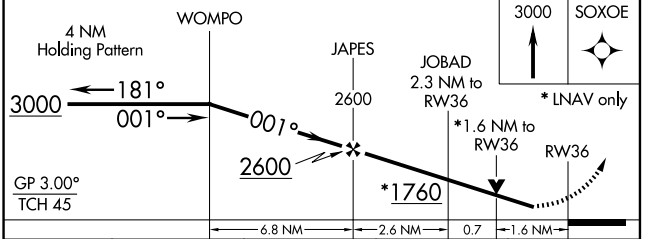


CATEGORY	A	B	C	D
LPV DA	1306-⅞	309 (400-⅞)		
LNAV/VNAV DA	1299-⅞	302 (300-⅞)		
LNAV MDA	1540-1	543 (600-1)	1540-1⅝	543 (600-1⅝)
CIRCLING	1540-1	536 (600-1)	1780-2¼ 776 (800-2¼)	1780-2½ 776 (800-2½)

ELEV 1004 TDZE 997

REIL Rwys 11, 18, 29 and 36 L

MIRL Rwys 11-29 and 18-36 L

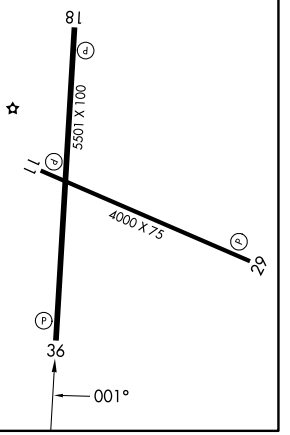

NC-3, 29 OCT 2026 to 26 NOV 2026
NC-3, 29 OCT 2026 to 26 NOV 2026