RNAV (GPS) RWY 5


NORTH VERNON (OVO)


WAAS CH 70713 W05A	APP CRS 050°	Rwy Ldg 5002 TDZE 757 Apt Elev 757


T NA — For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Shelbyville altimeter setting and increase LPV DA to 1175, LNAV/VNAV DA to 1200, and all MDAs 100 feet. Increase LPV all Cats visibility ⅛ SM, LNAV/VNAV and LNAV and Circling Cat C visibility ¼ SM. VDP and Baro-VNAV NA when using Shelbyville alimeter setting. Helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 2800 direct KONVY and on track 353° to HIGMA and hold.

AWOS-3PT	INDIANAPOLIS APP CON	UNICOM
121.875	134.85 317.8	122.7 (CTAF) L

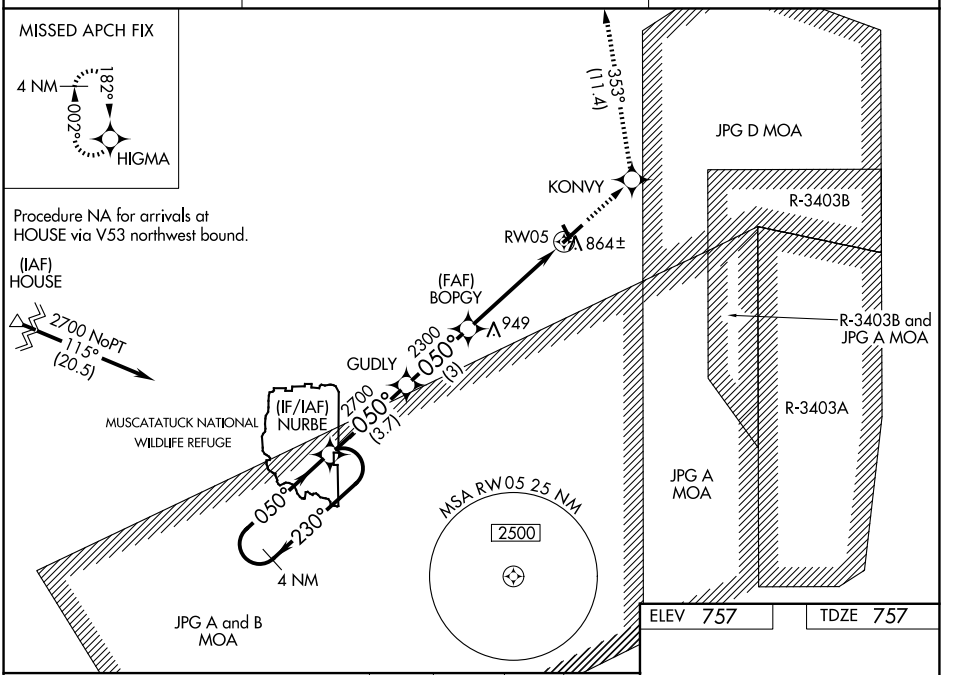

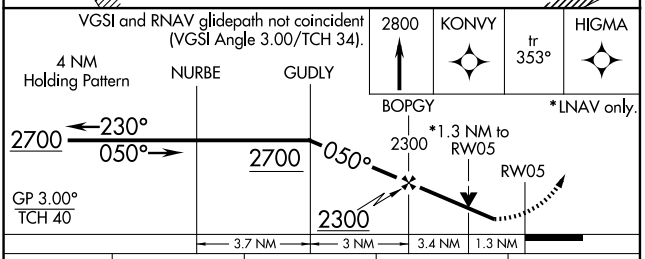



CATEGORY	A	B	C	D
LPV DA	1091-1¼ 334 (400-1¼)			NA
LNAV/VNAV DA	1116-1¼ 359 (400-1¼)			NA
LNAV MDA	1200-1 443 (500-1)		1200-1⅜ 443 (500-1⅜)	NA
CIRCLING	1200-1 443 (500-1)	1300-1 543 (600-1)	1300-1½ 543 (600-1½)	NA

MIRL Rwy 5-23 L
MIRL Rwy 15-33

EC-2, 29 OCT 2026 to 26 NOV 2026
EC-2, 29 OCT 2026 to 26 NOV 2026