RNAV (GPS) RWY 18

JASPER COUNTY (RZL)


WAAS	APP CRS	Rwy Idg	4000
CH 70527	182°	TDZE	698
W18A		Apt Elev	698


RNP APCH.

Baro-VNAV NA when using Knox altimeter setting. For uncompensated Baro-VNAV systems LNAV/VNAV NA below -22°C or above 54°C. When local altimeter setting not received, use Knox altimeter setting: increase LPV DA to 1026 feet and increase visibility all Cats ¼ SM; increase LNAV/VNAV DA to 1174 feet and visibility all Cats ⅛ SM; increase all MDAs 80 feet and LNAV visibility Cat C ⅛ SM, and Circling visibility Cat C ¼ SM. Rwy 18 helicopter visibility reduction below 1 SM NA. Circling NA to Rwys 9 and 27.


MISSED APPROACH: Climb to 2600 direct WUPAL and hold.

AWOS-3P	CHICAGO CENTER	UNICOM
119.175	132.5 284.7	122.8 (CTAF) L

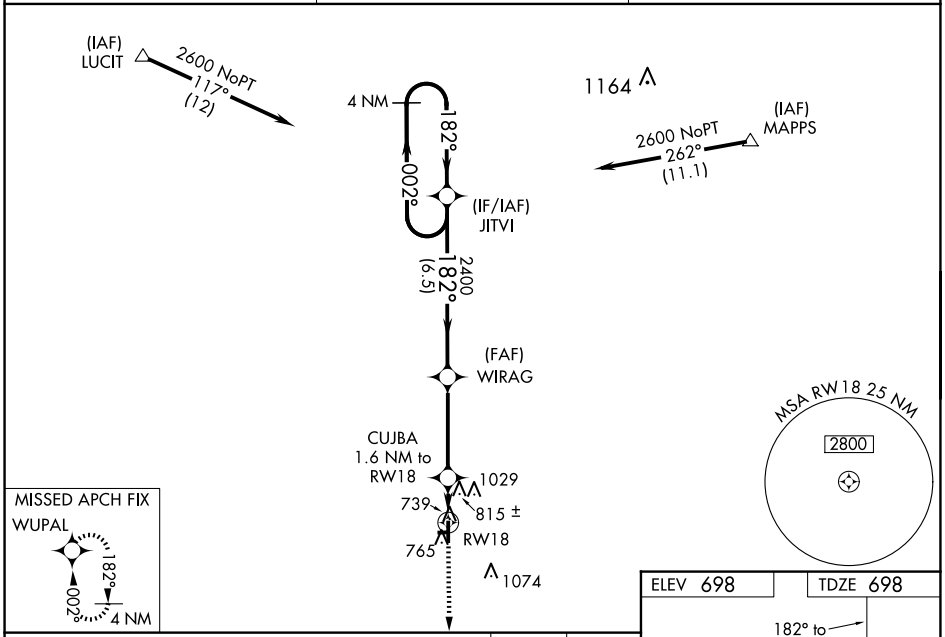

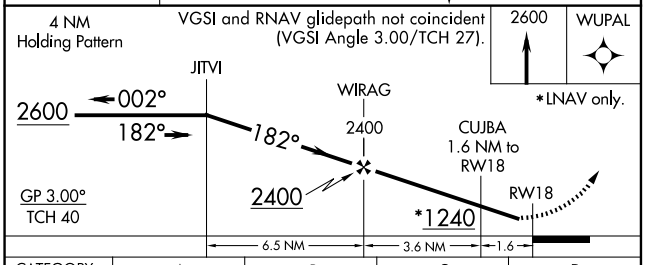

CATEGORY	A	B	C	D
LPV DA	948-1 250 (300-1)			NA
LNAV/VNAV DA	1096-1⅜ 398 (400-1⅜)			NA
LNAV MDA	1080-1 382 (400-1)		1080-1⅛ 382 (400-1⅛)	NA
CIRCLING	1120-1 422 (500-1)	1380-1 682 (700-1)	1440-2¼ 742 (800-2¼)	NA

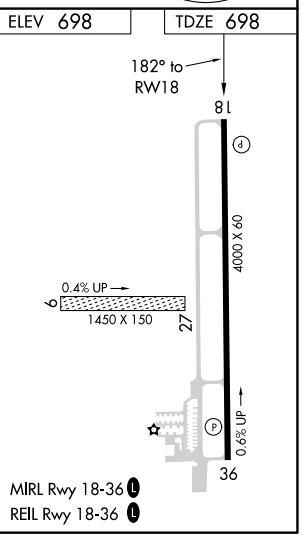

EC-2, 29 OCT 2026 to 26 NOV 2026
EC-2, 29 OCT 2026 to 26 NOV 2026