RNAV (GPS) RWY 36

JASPER COUNTY (RZL)


WAAS	APP CRS	Rwy Idg	4000
CH 82327	002°	TDZE	681
W36A		Apt Elev	698


RNP APCH.


Baro-VNAV NA when using Knox altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C or above 54°C. When local altimeter setting not received use Knox altimeter setting and increase all DA 78 feet and all MDA 80 feet, increase LPV and LNAV/VNAV all Cats visibility ⅛ mile and LNAV and Circling Cat C visibility ¼ mile. Rwy 36 helicopter visibility reduction below 1 SM NA. Circling NA to Rwys 9 and 27.

MISSED APPROACH: Climb to 2600 direct JITVI and hold.

AWOS-3P	CHICAGO CENTER	UNICOM
119.175	132.5 284.7	122.8 (CTAF)

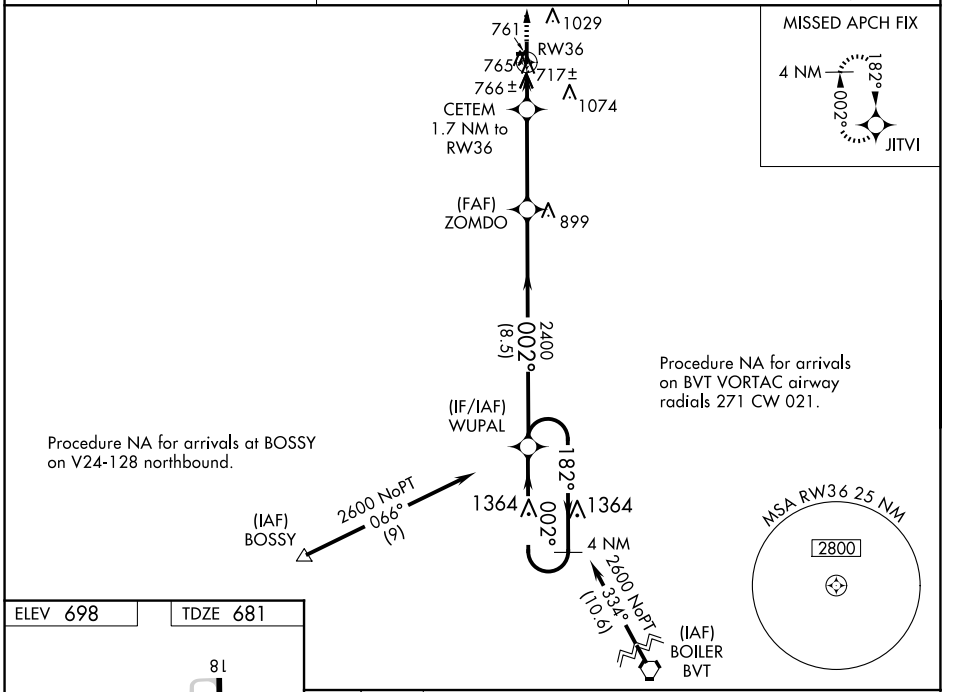

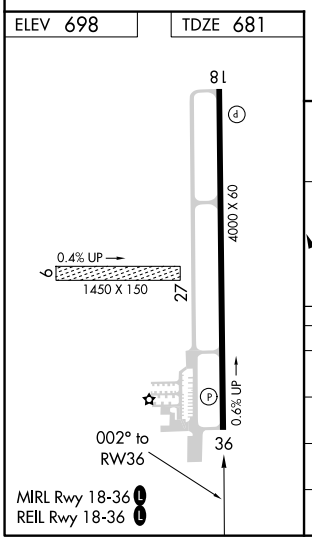

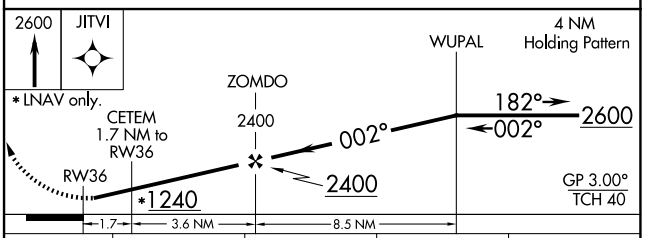

CATEGORY	A	B	C	D
LPV DA	931-1 250 (300-1)			NA
LNAV/VNAV DA	947-1 266 (300-1)			NA
LNAV MDA	1020-1 339 (400-1)			NA
CIRCLING	1120-1 422 (500-1)	1380-1 682 (700-1)	1440-2¼ 742 (800-2¼)	NA

EC-2, 29 OCT 2026 to 26 NOV 2026
EC-2, 29 OCT 2026 to 26 NOV 2026