WAAS	APP CRS	Rwy Ldg	5003
CH 99707	005°	TDZE	979
W36A		Apt Elev	979


RNAV (GPS) RWY 36
WINCHESTER MUNI (BGF)


RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16° C or above 54° C. When local altimeter setting not received, use Chattanooga altimeter setting: increase LPV DA to 1483 feet and all visibilities ⅜ SM; increase LNAV/VNAV DA to 1510 feet and all visibilities ⅜ SM; increase all MDAs 160 feet and LNAV visibility Cat C ⅜ SM and Circling Cat B/C ½ SM. Baro-VNAV and VDP NA when using Chattanooga altimeter setting. Rwy 36 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 4000 direct ZEDUX and hold.


AWOS-3	MEMPHIS CENTER	GCO	UNICOM
121.675	128.15 323.125	121.725	122.8 (CTAF)

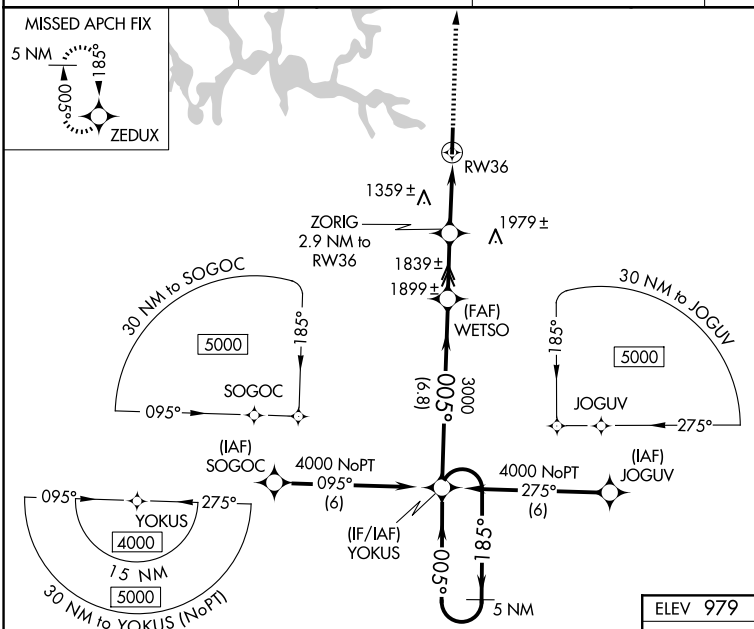

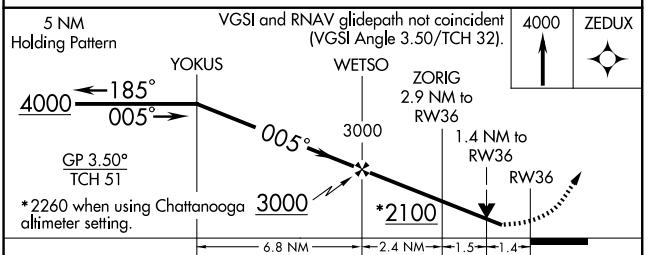

CATEGORY	A	B	C	D
LPV DA	1340-1 361 (400-1)			NA
LNAV/VNAV DA	1367-1⅛ 388 (400-1⅛)			NA
LNAV MDA	1540-1 561 (600-1)		1540-1⅝ 561 (600-1⅝)	NA
CIRCLING	1540-1 561 (600-1)	1780-1 801 (900-1)	1820-2½ 841 (900-2½)	NA

ELEV 979 TDZE 979

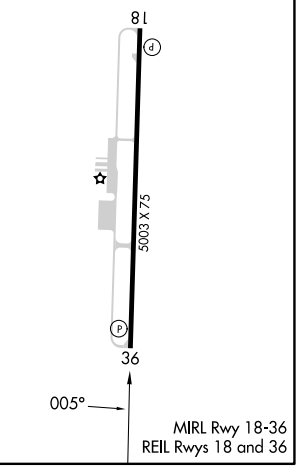

SE-1, 29 OCT 2026 to 26 NOV 2026
SE-1, 29 OCT 2026 to 26 NOV 2026