WAAS	APP CRS	Rwy Ldg	4200
CH 40107	169°	TDZE	1047
W17A		Apt Elev	1047


RNAV (GPS) RWY 17
DECATUR MUNI (LUD)


RNP APCH - GPS.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Baro-VNAV and VDP NA when using FTW altimeter setting. When local altimeter setting not received, use FTW altimeter setting and increase LPV DA to 1408 feet; increase LNAV/VNAV DA to 1466 feet and all visibilities ⅛ SM; increase all MDAs 120 feet.


MISSED APPROACH: Climb to 1500 then climbing right turn to 4000 direct NERME and hold, continue climb-in-hold.

AWOS-3	LONE STAR APP CON	UNICOM
118.225	118.1 306.95	123.075 (CTAF)

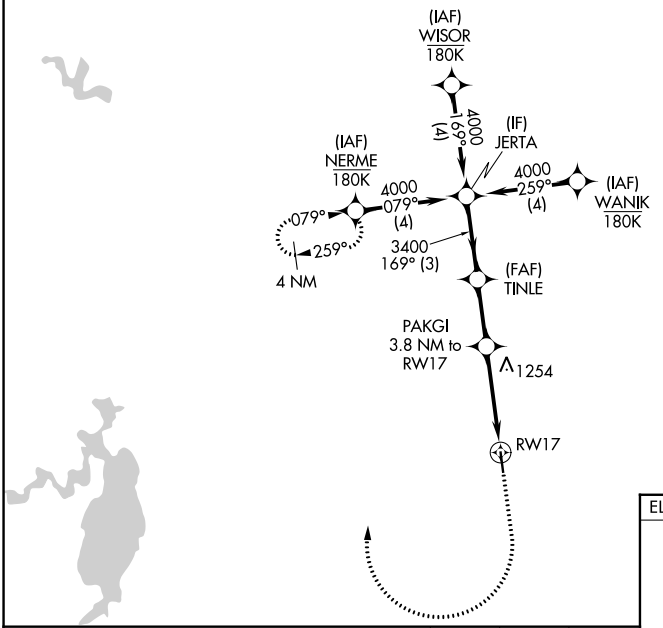



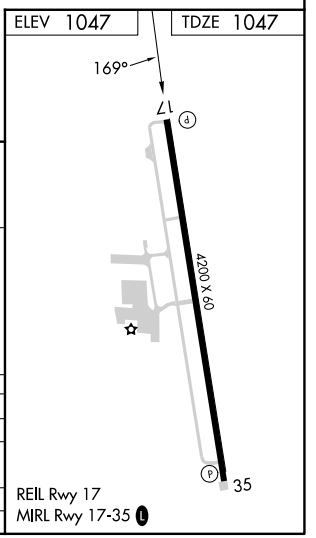

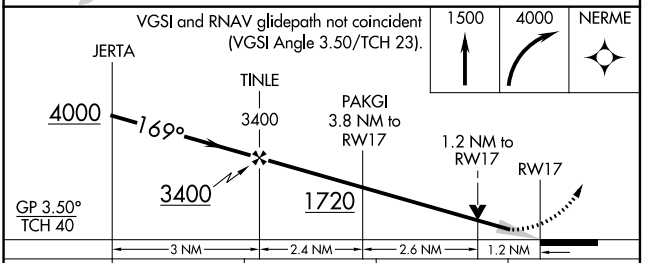

CATEGORY	A	B	C	D
LPV DA	1297-1	250 (300-1)	NA	
LNAV/VNAV DA	1355-1	308 (400-1)	NA	
LNAV MDA	1500-1	453 (500-1)	NA	
CIRCLING	1600-1	553 (600-1)	NA	

SC-2, 29 OCT 2026 to 26 NOV 2026
SC-2, 29 OCT 2026 to 26 NOV 2026