WAAS CH **53447** **W35A**	APP CRS **349°**	Rwy Ldg **4200** TDZE **1047** Apt Elev **1047**

RNAV (GPS) RWY 35


DECATUR MUNI (LUD)


RNP APCH - GPS.


Rwy 35 helicopter visibility reduction below ¾ SM NA. Baro-VNAV and VDP NA when using FTW altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use FTW altimeter setting and increase LPV DA to 1408 feet; increase LNAV/VNAV DA to 1661 feet and all visibilities ⅜ SM; increase all MDAs 120 feet.

MISSED APPROACH: Climb to 1700 then climbing left turn to 3000 direct RALAE and hold.

AWOS-3	LONE STAR APP CON	UNICOM
118.225	**118.1 306.95**	**123.075** (CTAF) L

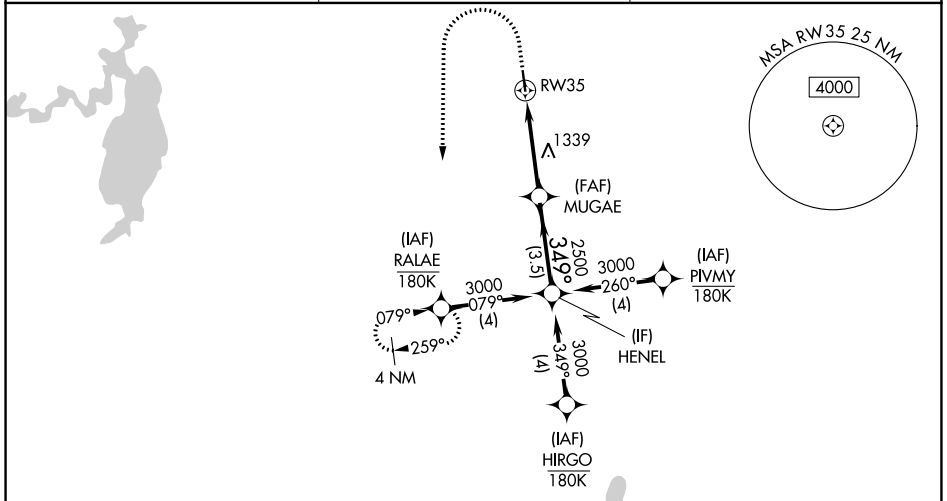

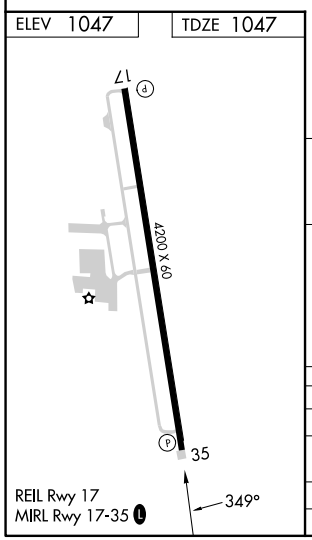

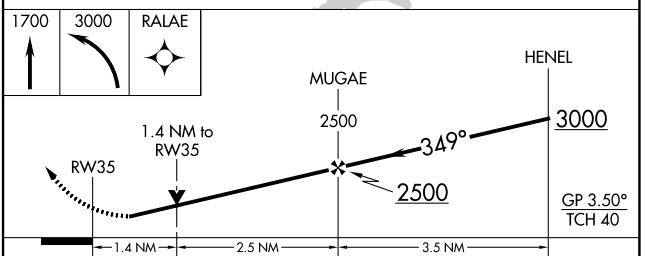

CATEGORY	A	B	C	D
LPV DA	1297-1	250 (300-1)	NA	
LNAV/VNAV DA	1550-1⅜	503 (600-1⅜)	NA	
LNAV MDA	1600-1	553 (600-1)	NA	
CIRCLING	1600-1	553 (600-1)	NA	

SC-2, 29 OCT 2026 to 26 NOV 2026
SC-2, 29 OCT 2026 to 26 NOV 2026