| APP CRS | Rwy Ldg | 3803 |
|---|---|---|
| 280° | TDZE | 422 |
| | Apt Elev | 424 |

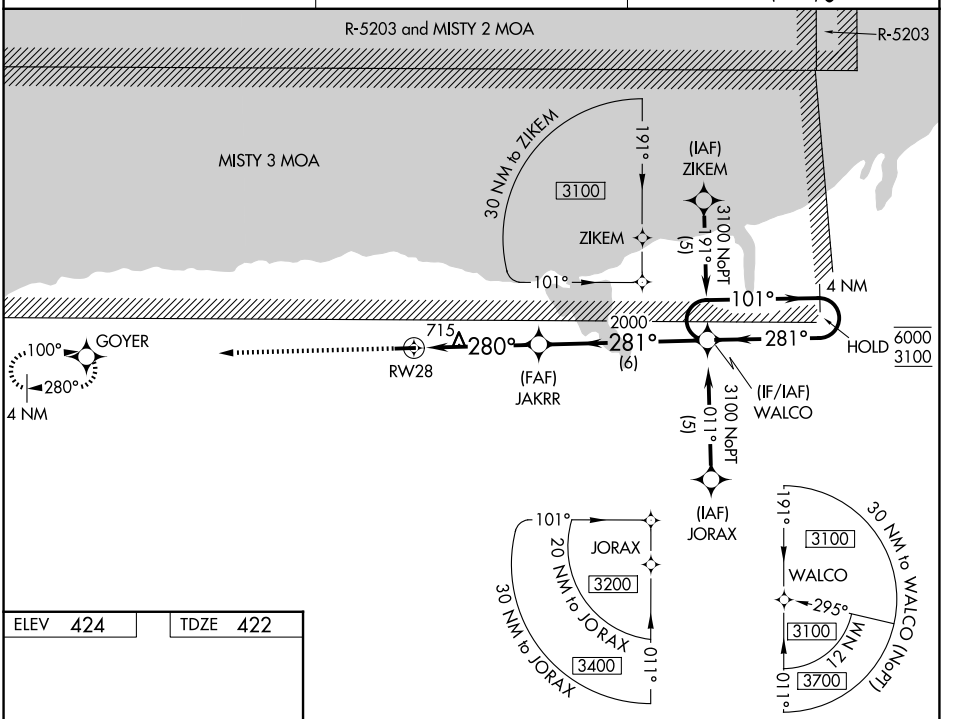
# RNAV (GPS) RWY 28
## WILLIAMSON/SODUS (SDC)


RNP APCH - GPS.

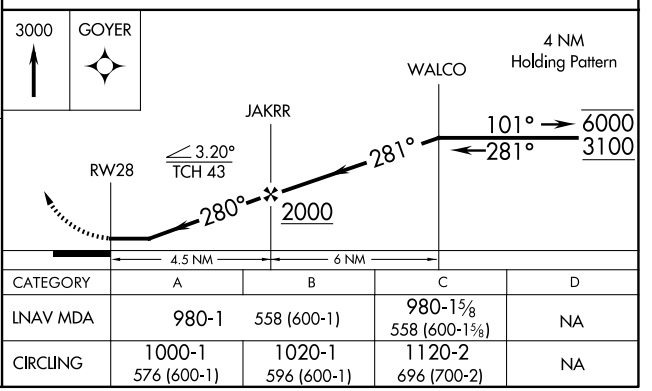
Procedure NA at night. Rwy 28 helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use Rochester altimeter setting and increase all MDAs 80 feet and LNAV visibility Cat C ⅛ SM, and Circling visibility Cat C ¼ SM.

MISSED APPROACH: Climb to 3000 direct GOYER and hold.

| AWOS-3 | ROCHESTER APP CON | UNICOM |
|---|---|---|
| 124.2 | 119.55 269.6 | 122.8 (CTAF) L |




| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LNAV MDA | 980-1 | 558 (600-1) | 980-1⅝ 558 (600-1⅝) | NA |
| CIRCLING | 1000-1 576 (600-1) | 1020-1 596 (600-1) | 1120-2 696 (700-2) | NA |

MIRL Rwy 10-28 L
REIL Rwys 10 and 28 L



NE-2, 29 OCT 2026 to 26 NOV 2026
NE-2, 29 OCT 2026 to 26 NOV 2026