| WAAS CH 40238 W27A | APP CRS 273° | Rwy Ldg 3641 / TDZE 708 / Apt Elev 708 |
|---|---|---|


# RNAV (GPS) RWY 27

ARENS FLD (RWN)


T A NA — Baro-VNAV NA. Use Knox altimeter setting; when not received, use Rochester altimeter setting and increase all DA/MDA 20 feet and LNAV/VNAV all Cats visibility ⅛ mile. DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 2400 direct ITELE and hold.

| OXI AWOS-3 | SOUTH BEND APP CON ★ | UNICOM |
|---|---|---|
| 135.775 | 132.05 257.8 | 122.8 (CTAF) L |

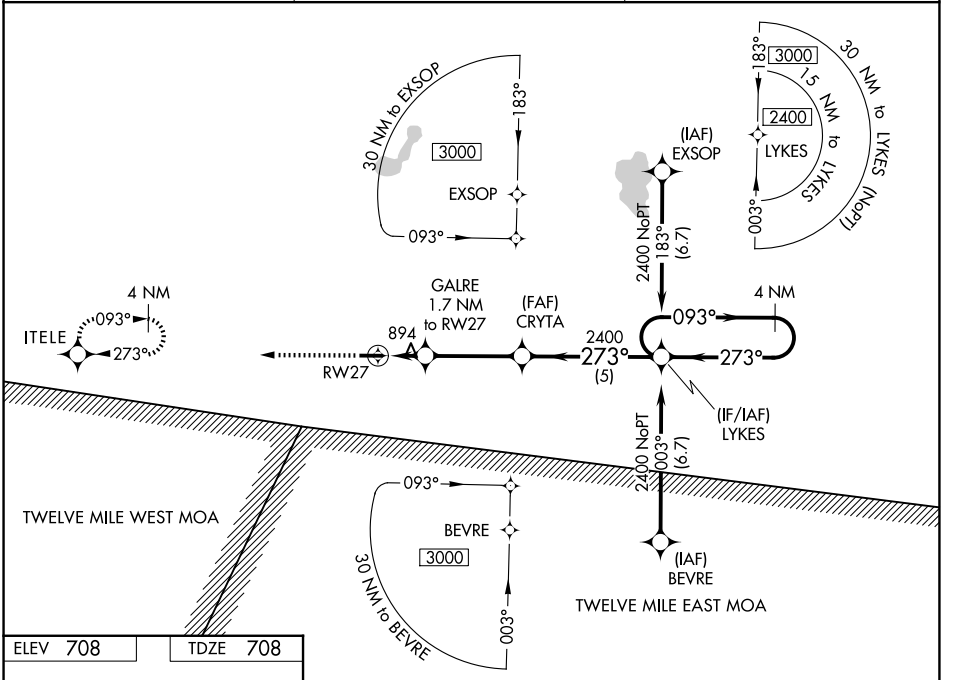


ELEV 708 | TDZE 708





MIRL Rwy 9-27 L
REIL Rwys 9 and 27 L

2400 | ITELE

VGSI and RNAV glidepath not coincident (VGSI Angle 3.50/TCH 23).

*LNAV only.

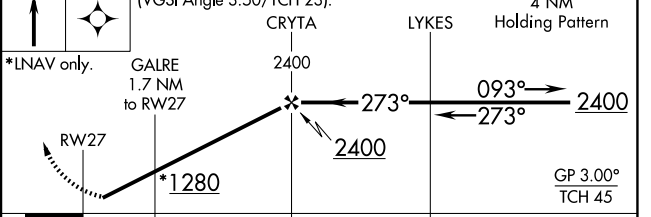


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 995-1 287 (300-1) | | | NA |
| LNAV/VNAV DA | 1224-1¾ 516 (600-1¾) | | | NA |
| LNAV MDA | 1200-1 492 (500-1) | | 1200-1⅜ 492 (500-1⅜) | NA |
| CIRCLING | 1240-1 532 (600-1) | | 1480-2¼ 772 (800-2¼) | NA |



EC-2, 29 OCT 2026 to 26 NOV 2026
EC-2, 29 OCT 2026 to 26 NOV 2026