WAAS	APP CRS	Rwy Ldg	4201
CH 42638	093°	TDZE	708
W09A		Apt Elev	708


RNAV (GPS) RWY 9

ARENS FLD (RWN)

Baro-VNAV NA. Use Knox altimeter setting; when not received, use Rochester altimeter setting and increase all DA/MDA 20 feet and LNAV Cat C visibility ⅛ mile. DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA.


MISSED APPROACH: Climb to 2400 direct LYKES and hold.


OXI AWOS-3	SOUTH BEND APP CON ★	UNICOM
135.775	132.05 257.8	122.8 (CTAF) L

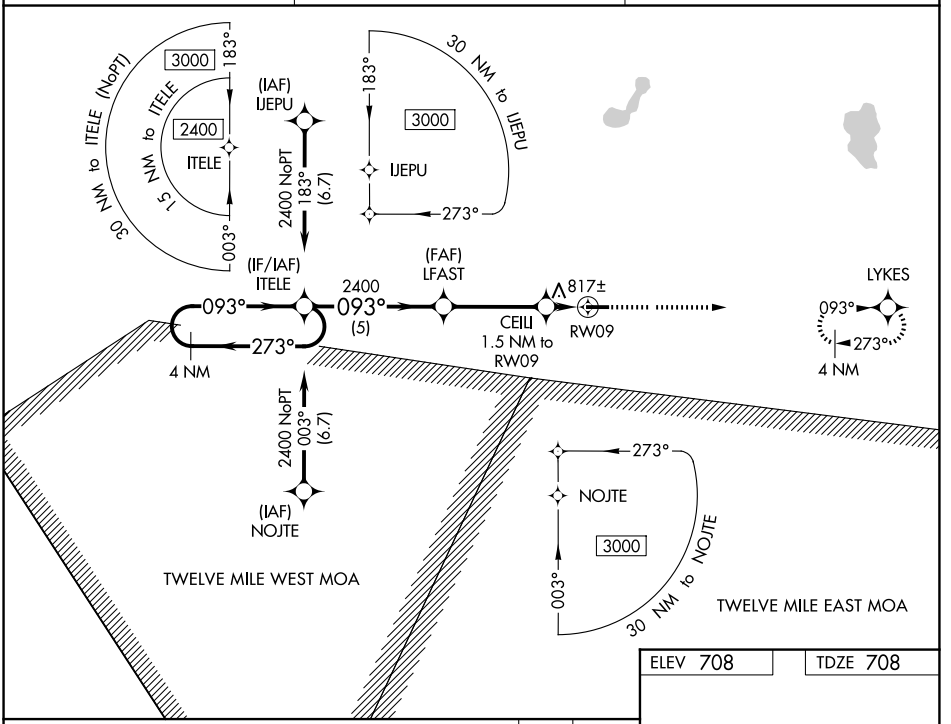

EC-2, 29 OCT 2026 to 26 NOV 2026

EC-2, 29 OCT 2026 to 26 NOV 2026

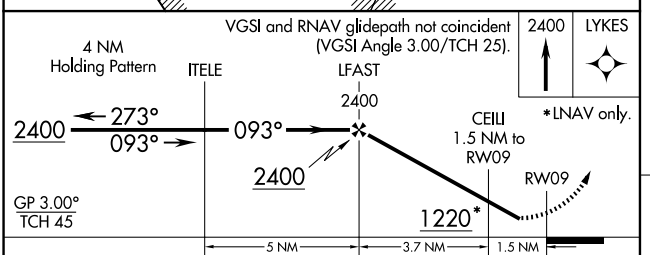



CATEGORY	A	B	C	D
LPV DA	995-1 287 (300-1)			NA
LNAV/VNAV DA	1132-1½ 424 (500-1½)			NA
LNAV MDA	1120-1 412 (500-1)		1120-1⅛ 412 (500-1⅛)	NA
CIRCLING	1240-1 532 (600-1)		1480-2¼ 772 (800-2¼)	NA

MIRL Rwy 9-27 L
REIL Rwys 9 and 27 L