RNAV (GPS) RWY 18

LITCHFIELD MUNI (3LF)


WAAS	APP CRS	Rwy Ldg	4002
CH 58203	179°	TDZE	686
W18A		Apt Elev	691


RNP APCH - GPS.

Baro-VNAV and VDP NA when using Taylorville altimeter setting. Rwy 18 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Taylorville altimeter setting and increase LPV DA to 1025 feet and all visibilities ⅛ SM, increase LNAV/VNAV DA to 1146 feet and all visibilities ¼ SM, increase all MDAs 80 feet and LNAV visibility Cat C ⅛ SM.


MISSED APPROACH: Climb to 3000 direct OREPE and hold.

AWOS-3PT	ST. LOUIS APP CON	UNICOM
118.175	124.2 353.9	122.8 (CTAF) L

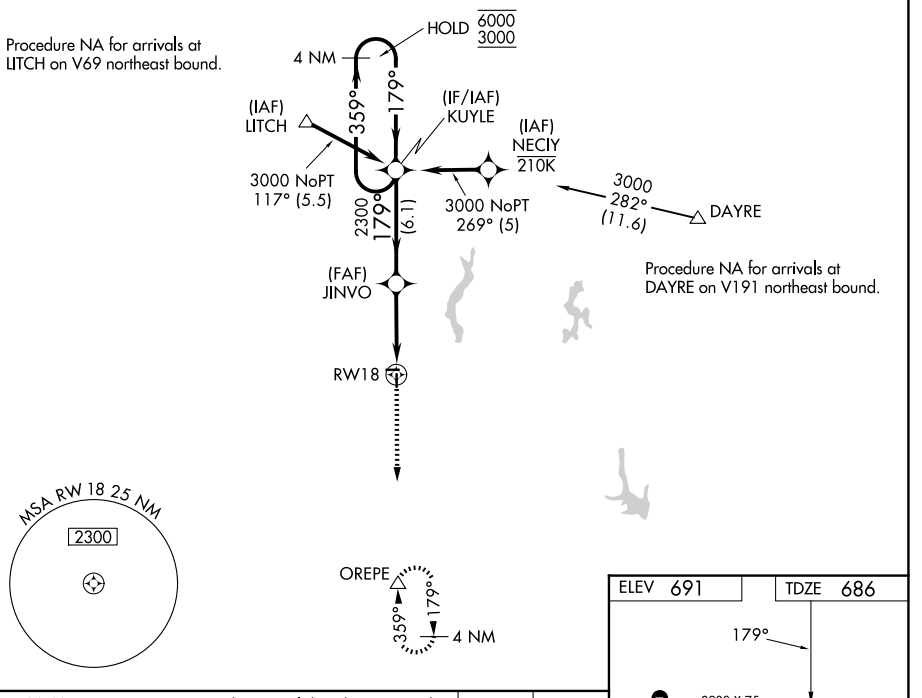

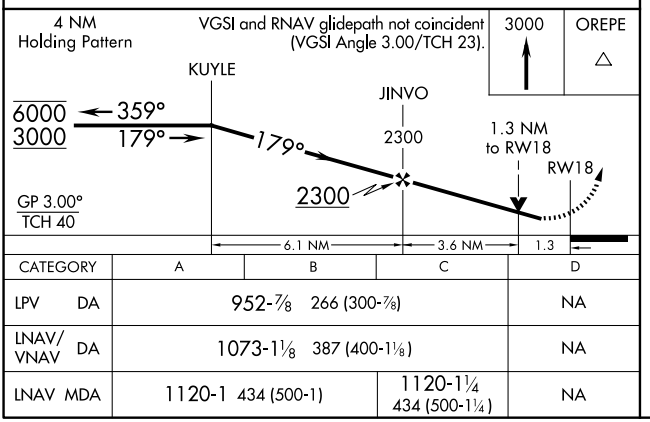

CATEGORY	A	B	C	D
LPV DA	952-⅞ 266 (300-⅞)			NA
LNAV/VNAV DA	1073-1⅛ 387 (400-1⅛)			NA
LNAV MDA	1120-1 434 (500-1)		1120-1¼ 434 (500-1¼)	NA

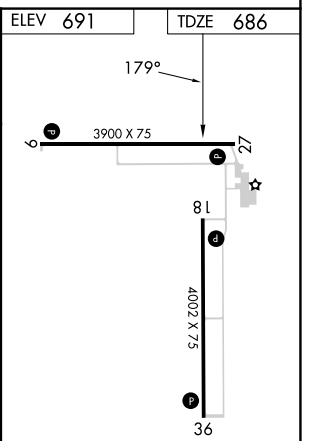

MIRL Rwys 9-27 and 18-36 L
REIL Rwys 9, 18, 27 and 36 L

EC-3, 29 OCT 2026 to 26 NOV 2026
EC-3, 29 OCT 2026 to 26 NOV 2026