RNAV (GPS) RWY 29

ST MARY'S COUNTY RGNL (2W6)


WAAS	APP CRS	Rwy Ldg	5350
CH 61313	292°	TDZE	137
W29A		Apt Elev	142


RNP APCH - GPS.


V A NA Rwy 29 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use Patuxent River altimeter setting: increase LPV DA to 475 feet and all visibilities ⅛ SM, increase LNAV/VNAV DA to 688 feet and all visibilities ¼ SM. Increase all MDAs 40 feet and LNAV visibility Cats C/D ⅛ SM.

MISSED APPROACH: Climb to 700 then climbing left turn to 5000 direct COLIN and hold, continue climb in hold to 5000.

AWOS-3P	PATUXENT APP CON ★	UNICOM
119.575	121.0 250.3	123.0 (CTAF) L

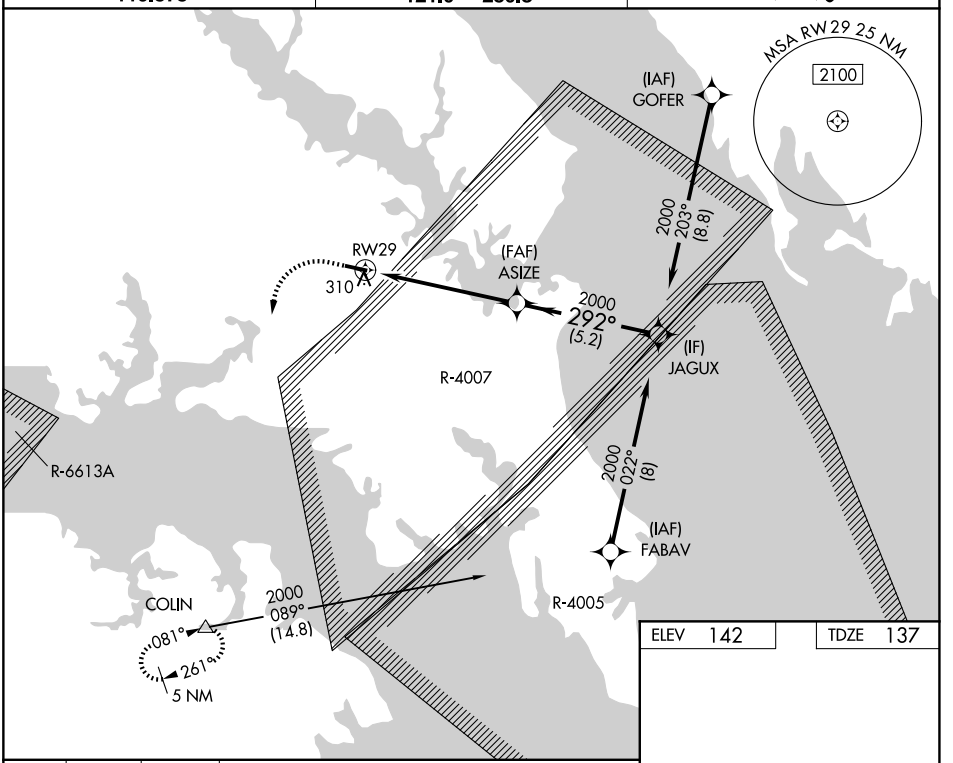

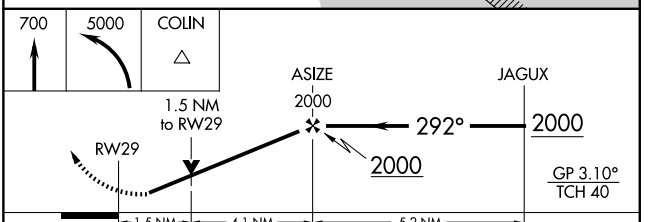



CATEGORY	A	B	C	D
LPV DA	441-7/8	304 (300-7/8)		
LNAV/VNAV DA	654-1 3/8	517 (600-1 3/8)		
LNAV MDA	620-1	483 (500-1)	620-1 3/8	483 (500-1 3/8)
CIRCLING	660-1	518 (600-1)	840-2	698 (700-2)
			840-2 1/4	698 (700-2 1/4)

REIL Rwys 11 and 29 L
MIRL Rwy 11-29 L

NE-3, 29 OCT 2026 to 26 NOV 2026
NE-3, 29 OCT 2026 to 26 NOV 2026