RNAV (GPS) RWY 24

COLUMBUS COUNTY RGNL (CPC)

WAAS	APP CRS	Rwy Ldg	5500
CH 86638	235°	TDZE	86
W24A		Apt Elev	99

RNP APCH - GPS.


Baro-VNAV and VDP NA when using EYF altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Rwy 24 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use EYF altimeter setting and increase LPV DA to 427 feet and all visibilities ⅛ SM. Increase LNAV/VNAV DA to 441 feet and all visibilities ⅛ SM. Increase all MDAs 60 feet and LNAV visibility Cat C/D ¼ SM, and Circling visibility Cat C/D ¼ SM.

MISSED APPROACH: Climb to 2000 direct WADED and hold.


AWOS-3	MYRTLE BEACH APP CON ★	UNICOM
118.375	119.2 350.3	122.8 (CTAF) L

MISSED APCH FIX



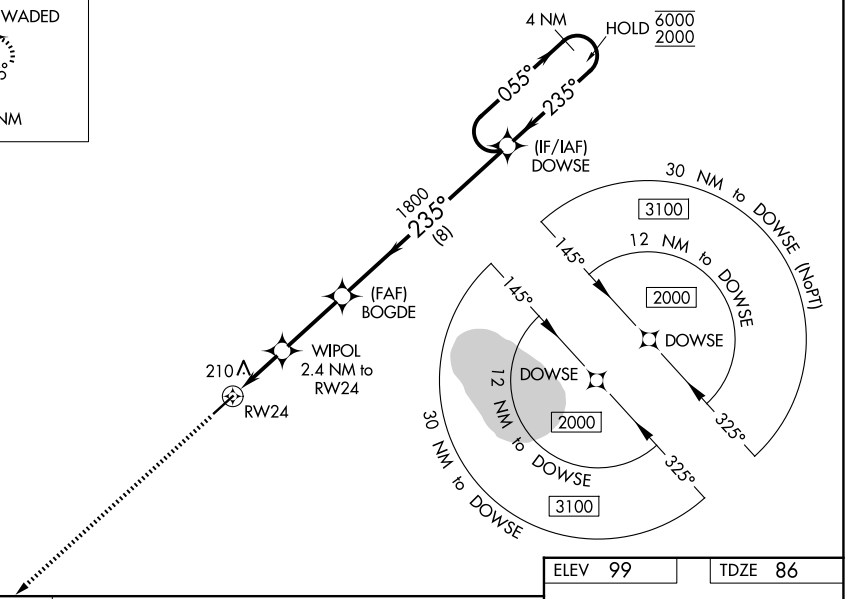


2000 WADED VGSI and RNAV glidepath not coincident (VGSI Angle 3.25/TCH 42).

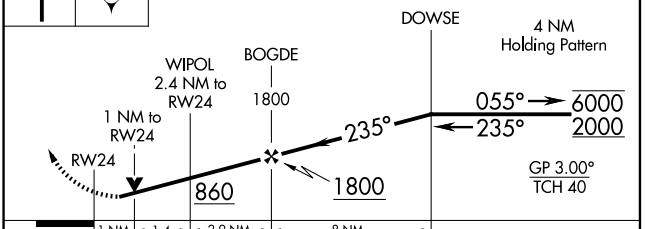

CATEGORY	A	B	C	D
LPV DA		374-⅞	288 (300-⅞)	
LNAV/VNAV DA		388-⅞	302 (300-⅞)	
LNAV MDA		460-1	374 (400-1)	
CIRCLING	540-1 441 (500-1)	580-1 481 (500-1)	680-1½ 581 (600-1½)	760-2¼ 661 (700-2¼)

ELEV 99 TDZE 86



REIL Rwys 6 and 24 L

MIRL Rwy 6-24 L

SE-2, 29 OCT 2026 to 26 NOV 2026
SE-2, 29 OCT 2026 to 26 NOV 2026