RNAV (GPS) RWY 36

MESQUITE METRO (HQZ)


WAAS	APP CRS	Rwy Ldg	6000
CH 78401	358°	TDZE	443
W36A		Apt Elev	447


RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C or above 54°C. Baro-VNAV and VDP NA when using DAL altimeter setting. When local altimeter setting not received, use DAL altimeter setting and increase LPV DA to 739 feet and all visibilities 1/8 SM. Increase LNAV/VNAV DA to 806 feet and all visibilities 1/8 SM. Increase all MDAs 60 feet and LNAV visibility Cat C 1/8 SM, and Circling visibility Cat C 1/4 SM.


MISSED APPROACH: Climb to 900 then climbing right turn to 3000 direct YEAGR and hold.

AWOS-3	LONE STAR APP CON	MESQUITE TOWER★	GND CON	UNICOM
118.175	125.2 343.65	120.3 (CTAF) L	118.85	123.05

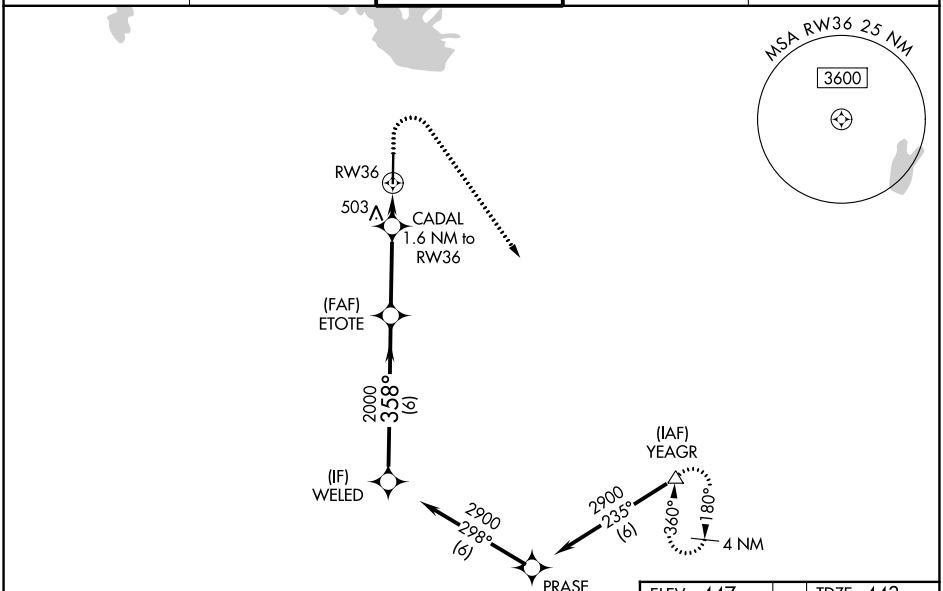

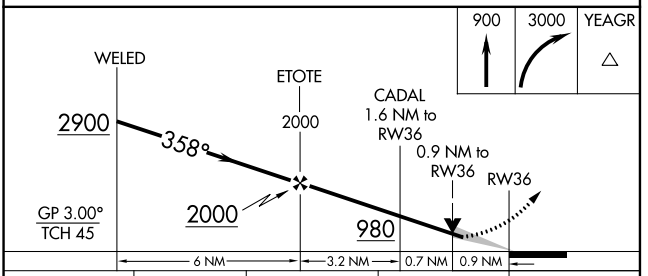

ELEV 447 TDZE 443

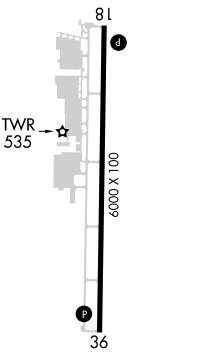

CATEGORY	A	B	C	D
LPV DA	693-¾	250 (300-¾)		NA
LNAV/VNAV DA	760-⅞	317 (400-⅞)		NA
LNAV MDA	760-1	317 (400-1)		NA
CIRCLING	960-1	513 (600-1)	1160-2 713 (800-2)	NA

SC-2, 29 OCT 2026 to 26 NOV 2026
SC-2, 29 OCT 2026 to 26 NOV 2026