WAAS CH 69646 W07A	APP CRS 072°	Rwy Ldg 6005	TDZE 862	Apt Elev 862

RNAV (GPS) RWY 7


INDIANAPOLIS RGNL (MQJ)


RNP APCH - GPS.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.
Rwy 7 helicopter visibility reduction below ¾ SM NA. Baro-VNAV and VDP NA when using IND altimeter setting. When local altimeter setting not received, use IND altimeter setting and increase LPV DA to 1271 feet and all visibilities ⅛ SM; increase LNAV/VNAV DA to 1194 feet and all visibilities ⅛ SM; increase all MDAs 60 feet and LNAV visibility Cat C and D ¼ SM.

MISSED APPROACH: Climb to 2700 direct FOGBU and hold.

AWOS-3PT	INDIANAPOLIS APP CON	UNICOM
127.95	127.15 317.8	122.975 (CTAF) L

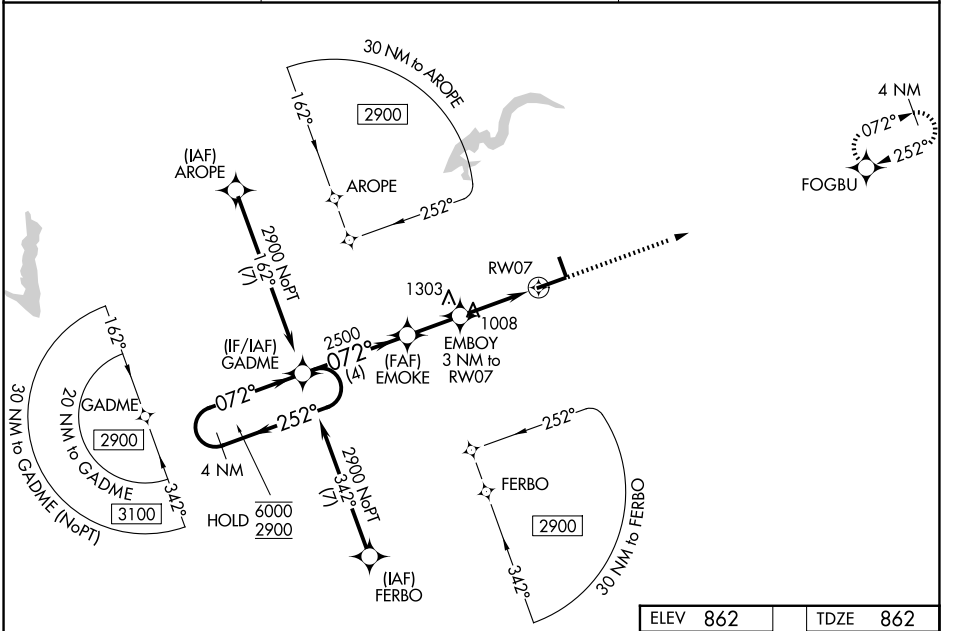

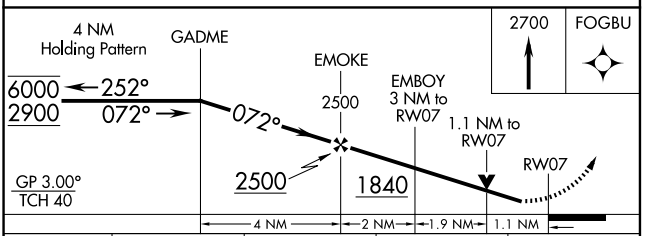

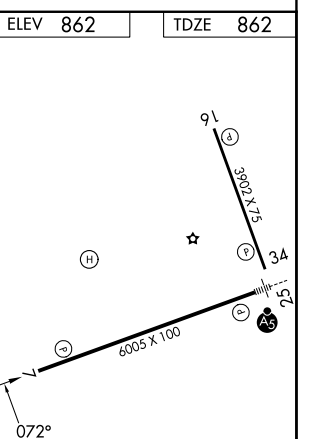

CATEGORY	A	B	C	D
LPV DA	1216-1	354 (400-1)		
LNAV/VNAV DA	1139-⅞	277 (300-⅞)		
LNAV MDA	1260-1	398 (400-1)	1260-1⅛	398 (400-1⅛)

REIL Rwys 7 and 34
MIRL Rwy 16-34
HIRL Rwy 7-25 L

EC-2, 29 OCT 2026 to 26 NOV 2026
EC-2, 29 OCT 2026 to 26 NOV 2026