RNAV (GPS) RWY 32

PEARLAND RGNL (LVJ)


WAAS CH 93621 W32A	APP CRS 322°	Rwy Ldg 4313 TDZE 43 Apt Elev 44

Circling to Rwy 14 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1°C (31°F) or above 54°C (130°F). When local altimeter setting not received, use William P Hobby altimeter setting and increase all DA 18 feet and all MDA 20 feet, increase LNAV/VNAV visibilities all Cats ⅛ mile. VDP and Baro-VNAV NA when using William P Hobby altimeter setting. DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA.


MISSED APPROACH: Climb to 500 then climbing left turn to 3000 direct ACOLA and hold.

ASOS	HOUSTON APP CON	UNICOM
118.525	134.45 284.0	122.725 (CTAF) L


RADAR REQUIRED

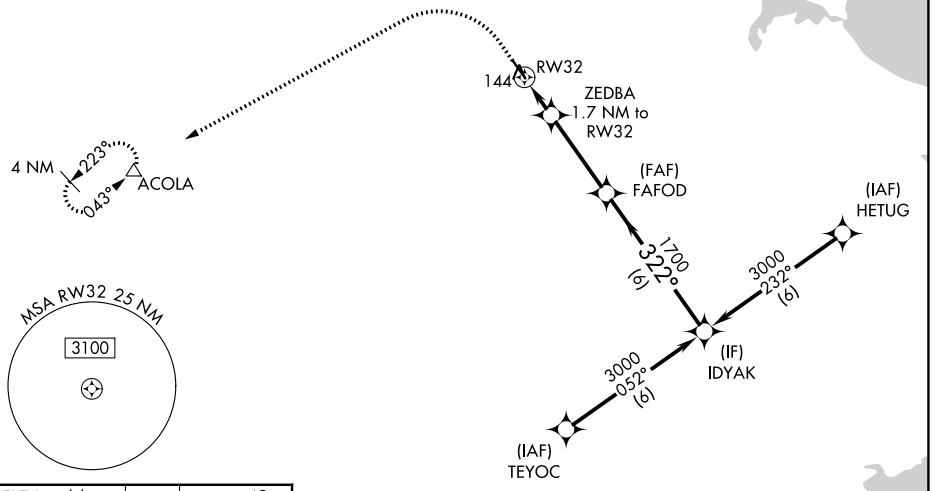

ELEV 44 TDZE 43

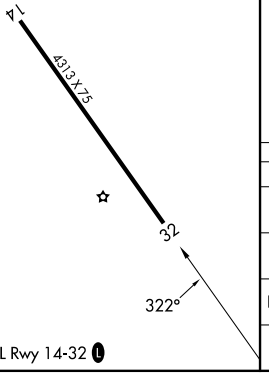

MIRL Rwy 14-32 L

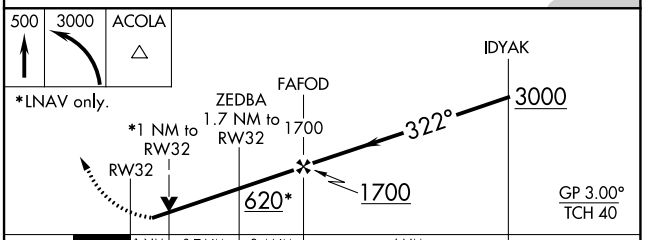

CATEGORY	A	B	C	D
LPV DA	293-⅞	250 (300-⅞)	NA	
LNAV/VNAV DA	310-⅞	267 (300-⅞)	NA	
LNAV MDA	400-1	357 (400-1)	NA	
CIRCLING	500-1 456 (500-1)	660-1 616 (700-1)	NA	

SC-5, 29 OCT 2026 to 26 NOV 2026
SC-5, 29 OCT 2026 to 26 NOV 2026