ILS or LOC RWY 5

CHESAPEAKE RGNL (CPK)


LOC/DME I-EYK	APP CRS	Rwy Ldg 5500
111.7	048°	TDZE 18
Chan 54		Apt Elev 19

When local altimeter setting not received, use ORF altimeter setting and increase DA to 256 feet; increase all MDAs 40 feet and CEKAD fix minimums S-LOC 5 visibility Cats C and D 1⅛ SM. For inop ALS, increase S-LOC 5 Cats C and D visibility to 1⅜ SM.


MALSR


MISSED APPROACH: Climb to 500 then climbing left turn to 2000 on heading 190° and ORF VORTAC R-216 to NALDE INT/I-EYK 12.3 DME and hold.

AWOS-3	NORFOLK APP CON	GCO	UNICOM
123.675	118.9 353.7	135.075	123.075 (CTAF)

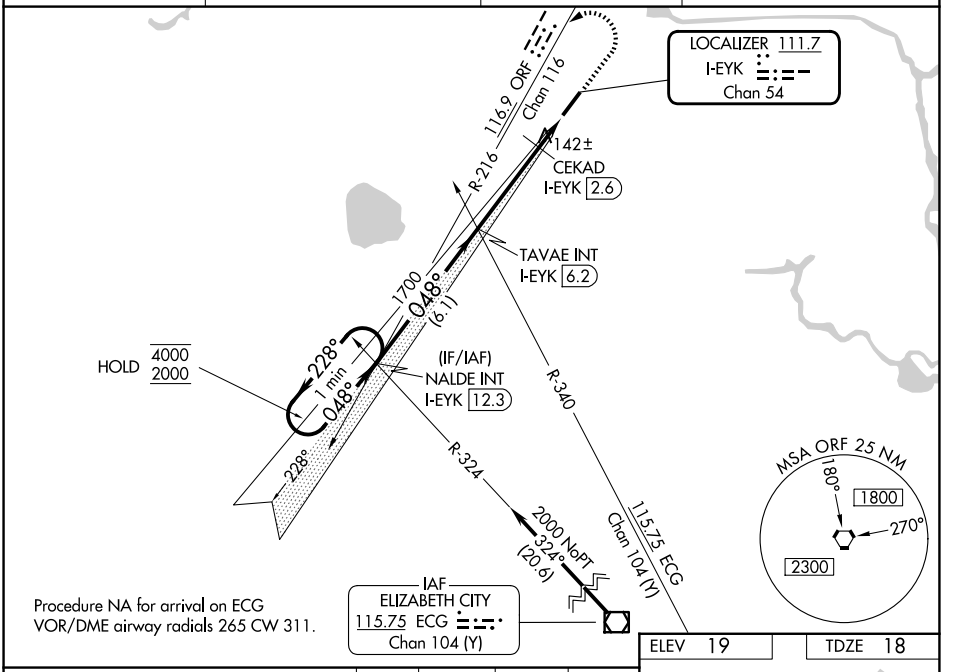

ELEV 19 TDZE 18

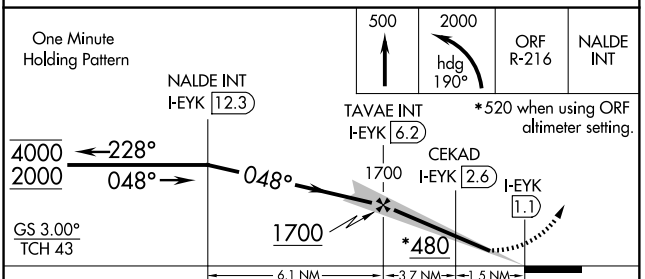

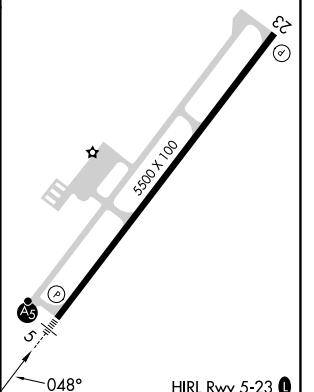

CATEGORY	A	B	C	D
S-ILS 5	218-½ 200 (200-½)			
S-LOC 5	480-½ 462 (500-½)		480-1 462 (500-1)	
CIRCLING	480-1 461 (500-1)		520-1½ 501 (600-1½)	580-2 561 (600-2)
CEKAD FIX MINIMUMS				
S-LOC 5	400-½ 382 (400-½)		400-⅝ 382 (400-⅝)	
CIRCLING	460-1 441 (500-1)	480-1 461 (500-1)	520-1½ 501 (600-1½)	580-2 561 (600-2)

FAF to MAP 5.2 NM

Knots	60	90	120	150	180
Min:Sec	5:12	3:28	2:36	2:05	1:44

NE-3, 29 OCT 2026 to 26 NOV 2026
NE-3, 29 OCT 2026 to 26 NOV 2026