RNAV (GPS) RWY 5

CHESAPEAKE RGNL (CPK)

WAAS CH 78222 W05A	APP CRS 048°	Rwy Ldg 5500 TDZE 18 Apt Elev 19


RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use ORF altimeter setting and increase LPV DA to 256 feet; increase LNAV/VNAV DA to 329 feet; increase all MDAs 40 feet and LNAV visibility Cat C/D ⅛ SM. Baro-VNAV NA when using ORF altimeter setting. For inop ALS, increase LNAV/VNAV all Cats visibility to ⅞ NM.

MALSR

MISSED APPROACH: Climb to 500 then climbing left turn to 2300 direct NALDE and hold.


AWOS-3	NORFOLK APP CON	GCO	UNICOM
123.675	118.9 353.7	135.075	123.075 (CTAF) L

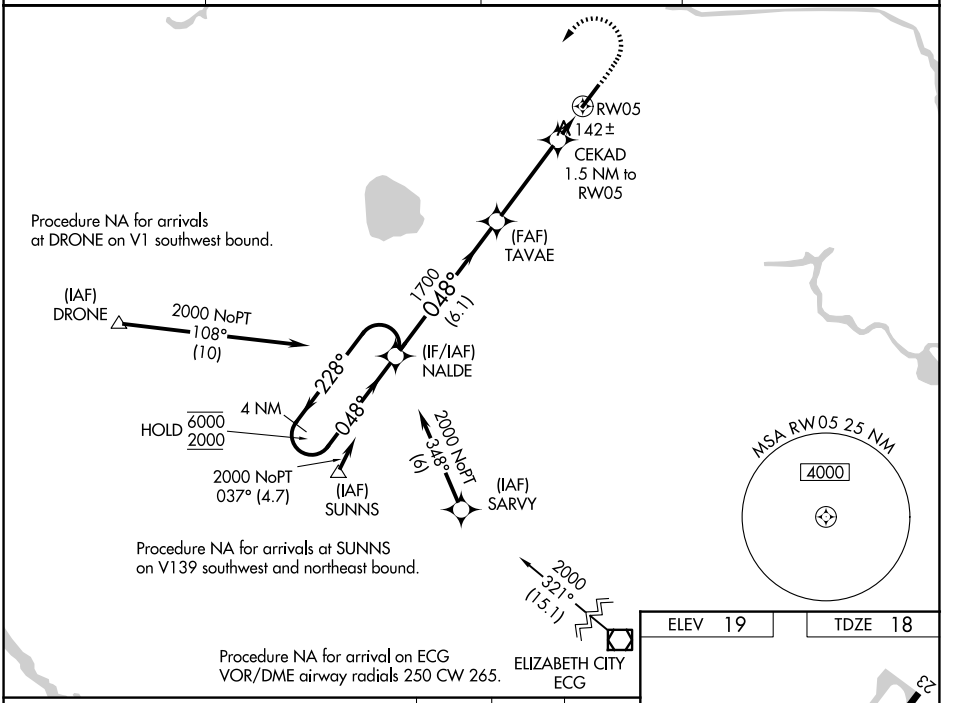


Procedure NA for arrivals at DRONE on V1 southwest bound.

Procedure NA for arrivals at SUNNS on V139 southwest and northeast bound.

Procedure NA for arrival on ECG VOR/DME airway radials 250 CW 265.

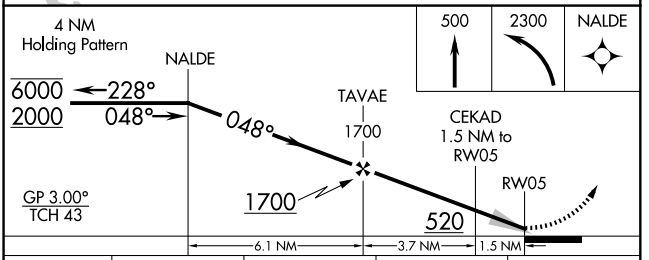

CATEGORY	A	B	C	D
LPV DA	218-½	200 (200-½)		
LNAV/VNAV DA	291-½	273 (300-½)		
LNAV MDA	400-½	382 (400-½)	400-⅝	382 (400-⅝)
CIRCLING	460-1 441 (500-1)	480-1 461 (500-1)	520-1½ 501 (600-1½)	580-2 561 (600-2)

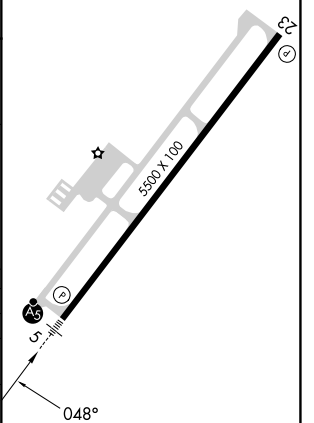

HIRL Rwy 5-23 L
REIL Rwy 23 L

NE-3, 29 OCT 2026 to 26 NOV 2026
NE-3, 29 OCT 2026 to 26 NOV 2026