RNAV (GPS) RWY 4R

CHANDLER MUNI (CHD)


WAAS	APP CRS	Rwy Ldg	4870
CH **93544**	**038°**	TDZE	**1240**
W04A		Apt Elev	**1243**


RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C.


MISSED APPROACH: (Do not exceed 210K until DECTU) Climb to 2200 then climbing right turn to 4000 direct to DECTU and hold.

ATIS	PHOENIX APP CON	CHANDLER TOWER ★	GND CON	UNICOM
128.325	**123.7 363.0**	**126.1** (CTAF) (L) (N and W) **133.1** (S and E)	**124.4**	**122.95**

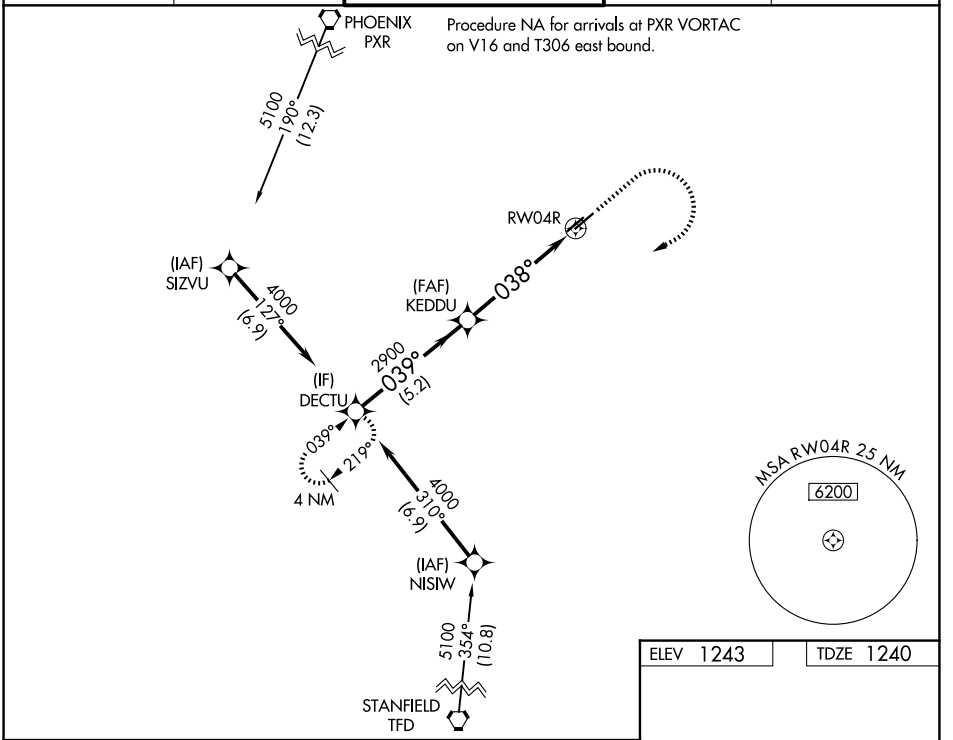

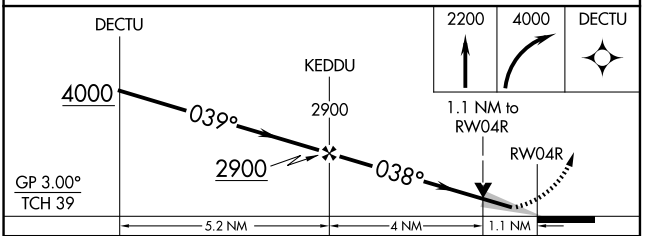

CATEGORY	A	B	C	D
LPV DA	1490-¾ 250 (300-¾)			NA
LNAV/VNAV DA	1640-1⅛ 400 (400-1⅛)			NA
LNAV MDA	1640-1 400 (400-1)		1640-1⅛ 400 (400-1⅛)	NA
CIRCLING	1700-1 457 (500-1)	1760-1 517 (600-1)	1760-1½ 517 (600-1½)	NA

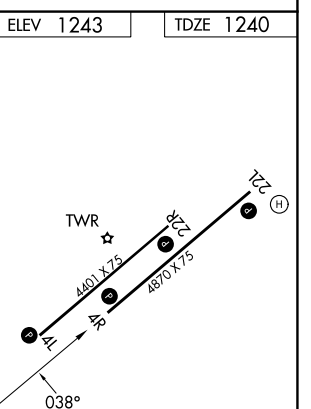

REIL Rwys 4R and 22L
MIRL Rwys 4L-22R and 4R-22L (L)

SW-4, 29 OCT 2026 to 26 NOV 2026
SW-4, 29 OCT 2026 to 26 NOV 2026