RNAV (GPS) RWY 21

JOHNSTON RGNL (JNX)


WAAS	APP CRS	Rwy Ldg	5500
CH 65937	212°	TDZE	164
W21A		Apt Elev	164


RNP APCH - GPS.


Rwy 21 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Baro-VNAV and VDP NA when using HRJ altimeter setting. When local altimeter setting not received, use HRJ altimeter setting and increase LPV DA to 574 feet and all visibilities ⅛ SM; increase LNAV/VNAV DA to 716 feet and all visibilities ¼ SM; increase all MDAs 60 feet and LNAV visibility Cat C/D ⅛ SM, and Circling visibility Cat C ¼ SM.

MISSED APPROACH: Climb to 2700 direct JIHDI and hold, continue climb-in-hold to 2700.

AWOS-3	RALEIGH APP CON	GCO	UNICOM
120.225	125.3 353.675	135.075	122.725 (CTAF) L

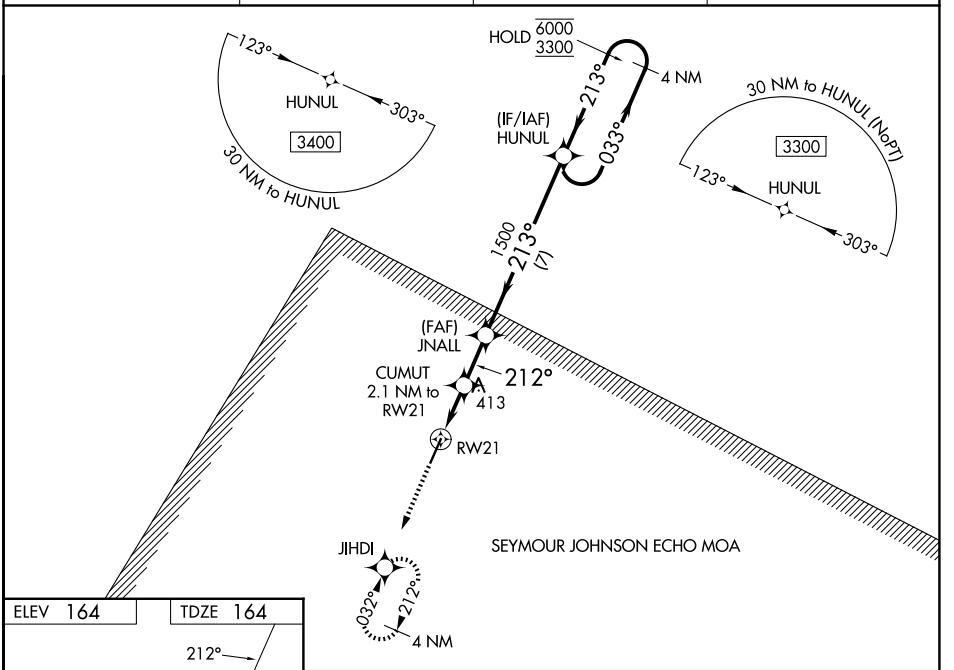

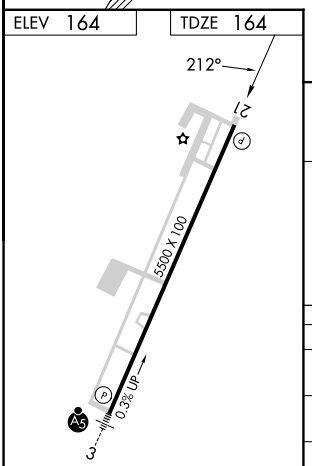

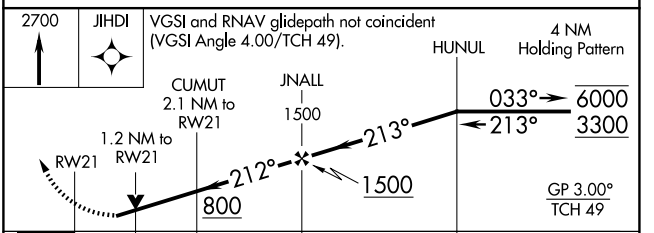

CATEGORY	A	B	C	D
LPV DA	524-1	360 (400-1)		
LNAV/VNAV DA	666-1⅜	502 (600-1⅜)		
LNAV MDA	720-1 556 (600-1)		720-1⅝ 556 (600-1⅝)	
CIRCLING	720-1 556 (600-1)		960-2¼ 796 (800-2¼)	1100-3 936 (1000-3)

SE-2, 29 OCT 2026 to 26 NOV 2026