RNAV (GPS) RWY 6

HENDERSON/OXFORD (HNZ)


WAAS CH 45709 W06A	APP CRS 060°	Rwy Ldg 5501 / TDZE 526 / Apt Elev 526


RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.
When local altimeter setting not received, use Roxboro altimeter setting: increase all DA to 875 feet and all visibilities ⅛ SM; increase all MDA 80 feet and visibility Cats C and D ¼ SM. Baro-VNAV and VDP NA when using Roxboro altimeter setting.
Rwy 6 helicopter visibility reduction below ¾ SM NA.


MISSED APPROACH: Climb to 3000 direct VEKUC and hold.

AWOS-3	RALEIGH APP CON	UNICOM
118.625	132.35 256.9	122.8 (CTAF) L

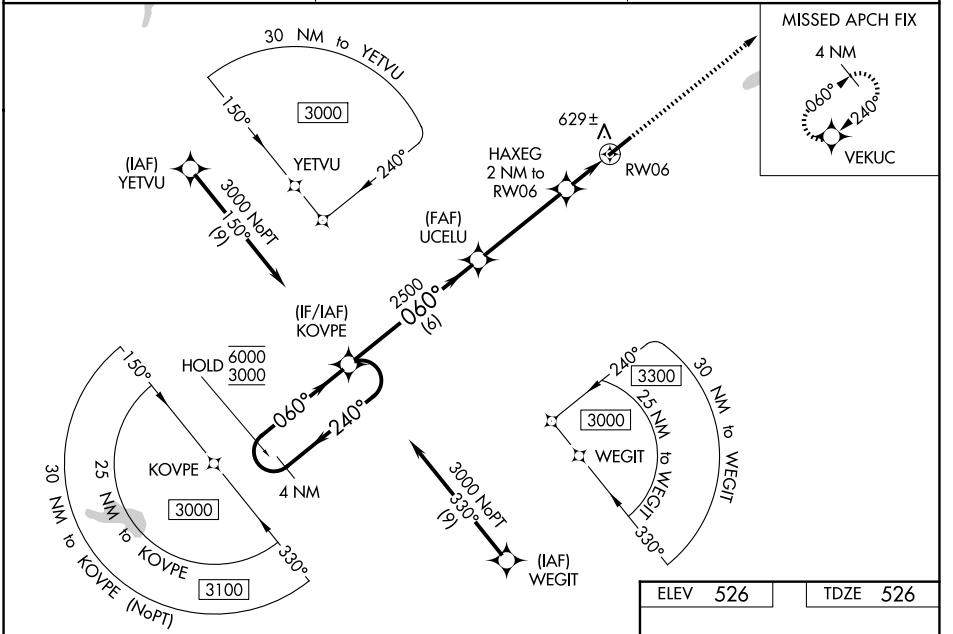

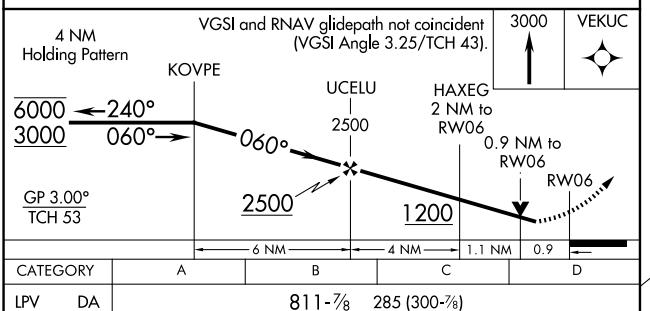

CATEGORY	A	B	C	D
LPV DA	811-⅞ 285 (300-⅞)			
LNAV/VNAV DA	810-⅞ 284 (300-⅞)			
LNAV MDA	880-1 354 (400-1)			
CIRCLING	960-1 434 (500-1)	980-1 454 (500-1)	1100-1½ 574 (600-1½)	1280-2½ 754 (800-2½)



SE-2, 29 OCT 2026 to 26 NOV 2026
SE-2, 29 OCT 2026 to 26 NOV 2026