WAAS	APP CRS	Rwy Ldg	5001
CH 50139	337°	TDZE	769
W34A		Apt Elev	774


RNAV (GPS) RWY 34
CASTROVILLE MUNI (CVB)

RNP APCH - GPS.


T A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Rwy 34 helicopter visibility reduction below ¾ SM NA. Circling Rwy 16 NA at night. When local altimeter setting not received, use SKF altimeter setting: increase LPV DA to 1064 feet; increase LNAV/VNAV DA to 1172 feet; increase all MDAs 60 feet and LNAV visibility Cat C ⅛ SM and Circling visibility Cat C ¼ SM.


MISSED APPROACH: Climb to 1300 then climbing left turn to 3000 direct SHEOL and hold.

AWOS-3PT	SAN ANTONIO APP CON	UNICOM
119.25	118.05 353.5	122.8 (CTAF) L

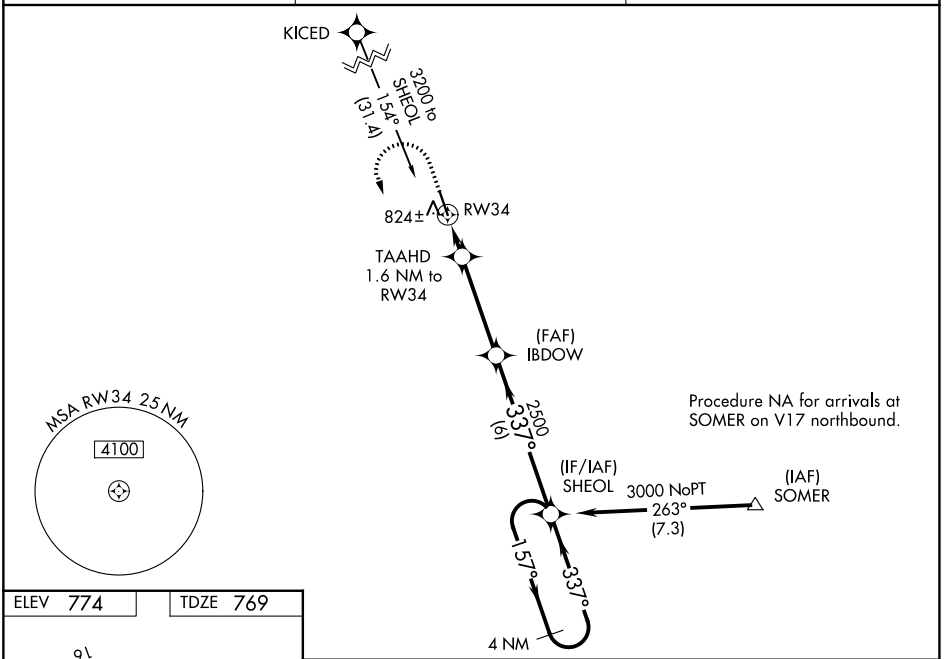

ELEV 774 TDZE 769

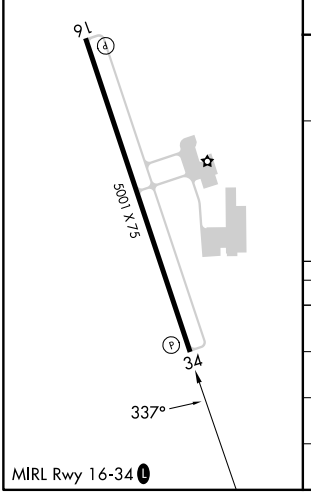

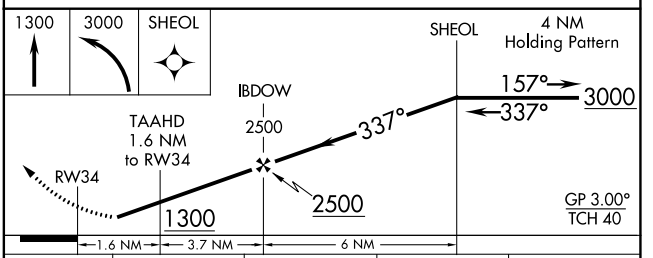

CATEGORY	A	B	C	D
LPV DA	1019-⅞ 250 (300-⅞)			NA
LNAV/VNAV DA	1127-1¼ 358 (400-1¼)			NA
LNAV MDA	1200-1 431 (500-1)		1200-1¼ 431 (500-1¼)	NA
CIRCLING	1200-1 426 (500-1)	1380-1 606 (700-1)	1580-2¼ 806 (900-2¼)	NA

SC-3, 29 OCT 2026 to 26 NOV 2026
SC-3, 29 OCT 2026 to 26 NOV 2026