RNAV (GPS) RWY 5

ENTERPRISE MUNI (EDN)


WAAS CH 72614 W05A	APP CRS 055°	Rwy Ldg 5080 TDZE 360 Apt Elev 361


RNP APCH - GPS.

Baro-VNAV NA when using OZR altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use OZR altimeter setting and increase LNAV visibility Cat C ⅛ SM. Circling Rwy 23 NA at night.

MISSED APPROACH: Climb to 2500 direct CEYLU and left turn via track 295° to HAXES and left turn via track 191° to ROTOY and hold.


AWOS-3PT	CAIRNS APP CON ★	UNICOM
118.9	133.45 239.275	122.8 (CTAF) L

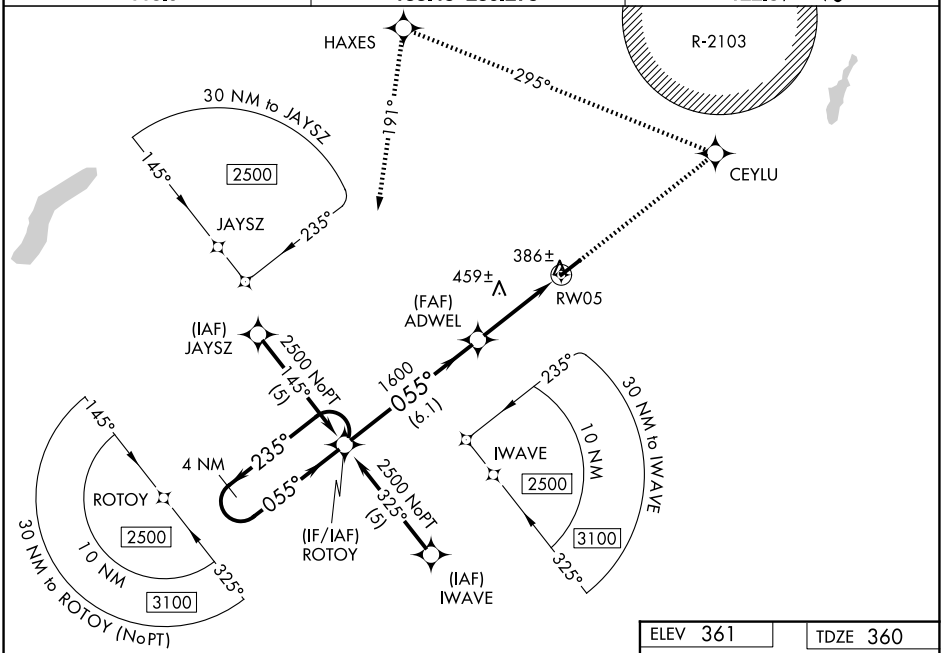

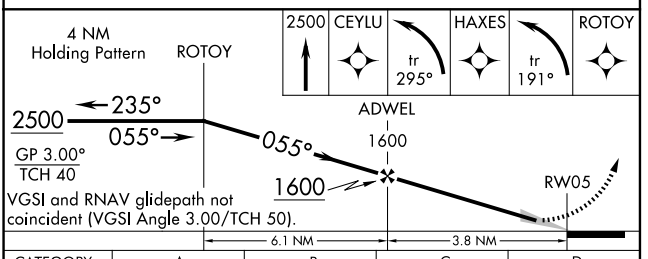

CATEGORY	A	B	C	D
LPV DA	642-1 282 (300-1)			NA
LNAV/VNAV DA	688-1¼ 328 (400-1¼)			NA
LNAV MDA	760-1 400 (400-1)		760-1⅛ 400 (400-1⅛)	NA
CIRCLING	920-1 559 (600-1)		1100-2 739 (800-2)	NA

ELEV 361 TDZE 360



REIL Rwys 5 and 23 L

MIRL Rwy 5-23 L

SE-4, 29 OCT 2026 to 26 NOV 2026
SE-4, 29 OCT 2026 to 26 NOV 2026