RNAV (GPS) RWY 14

NEW RICHMOND RGNL (RNH)

WAAS CH 82425 W14A	APP CRS 141°	Rwy Ldg 5507 TDZE 998 Apt Elev 998

RNP APCH.

Baro-VNAV NA when using Osceola altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 37°C (98°F). Rwy 14 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Osceola altimeter setting and increase all DA/MDA 40 feet; Circling visibility Cats C and D ¼ SM.

MISSED APPROACH: Climb to 3500 direct WUNTA and hold.

AWOS-3	MINNEAPOLIS APP CON	GCO	UNICOM
120.0	121.2 335.65	121.725	122.975 (CTAF) L

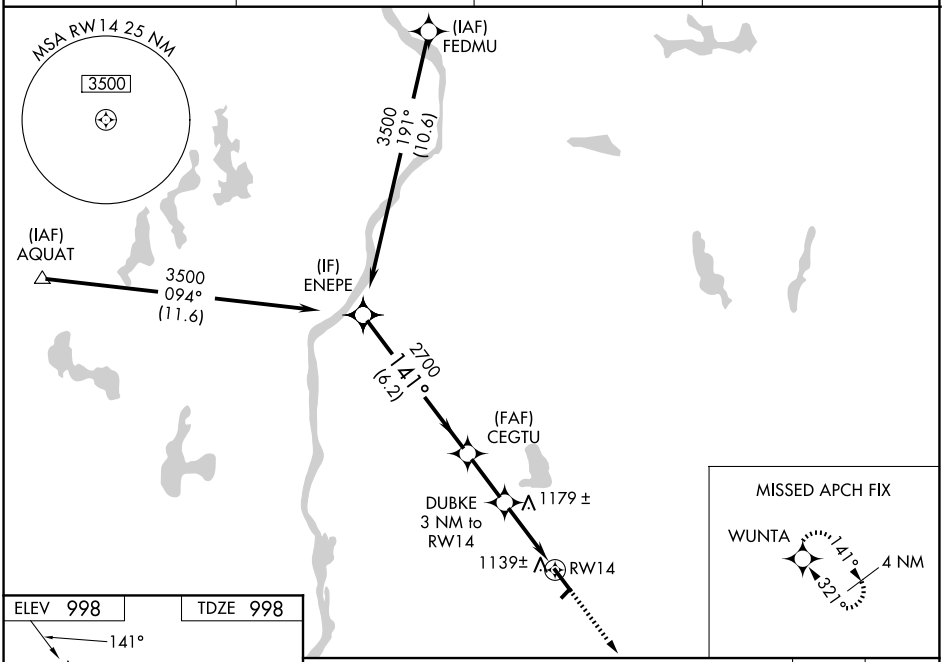

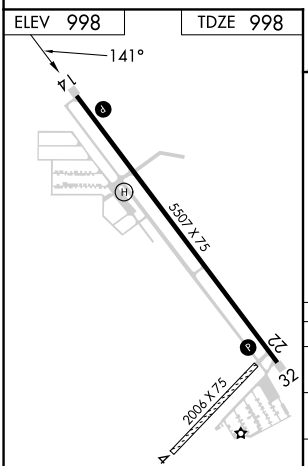

MIRL Rwy 14-32 L
REIL Rwys 14 and 32 L

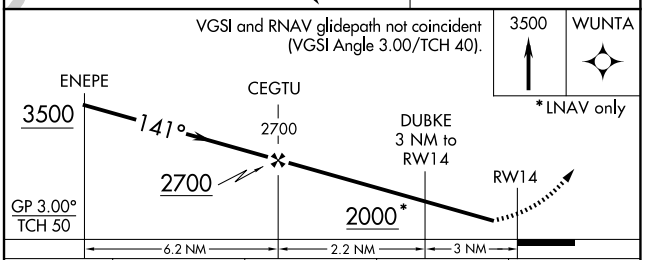

CATEGORY	A	B	C	D
LPV DA	1272-1 274 (300-1)			
LNAV/VNAV DA	1320-1 322 (400-1)			
LNAV MDA	1440-1 442 (500-1)		1440-1⅜ 442 (500-1⅜)	
CIRCLING	1540-1 542 (600-1)		1660-1¾ 662 (700-1¾)	1660-2 662 (700-2)

EC-3, 29 OCT 2026 to 26 NOV 2026
EC-3, 29 OCT 2026 to 26 NOV 2026