RNAV (GPS) RWY 18


CENTRAL KENTUCKY RGNL (RGA)

WAAS	APP CRS	Rwy Ldg	5001
CH 63114	180°	TDZE	978
W18A		Apt Elev	1003

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Lexington altimeter setting and increase LPV DA to 1295 feet, LNAV/VNAV DA to 1341 feet and all MDA 80 feet; increase LPV all Cats visibility ¼ mile; LNAV/VNAV all Cats and LNAV Cats C and D ¼ mile and Circling visibility Cat C ⅛ mile, Cat D ¼ mile. VDP and Baro-VNAV NA when using Lexington altimeter setting.

MISSED APPROACH: Climb to 3100 direct ANETT and hold.

AWOS-3	LEXINGTON APP CON	UNICOM
119.625	120.15 259.3	122.725 (CTAF) L

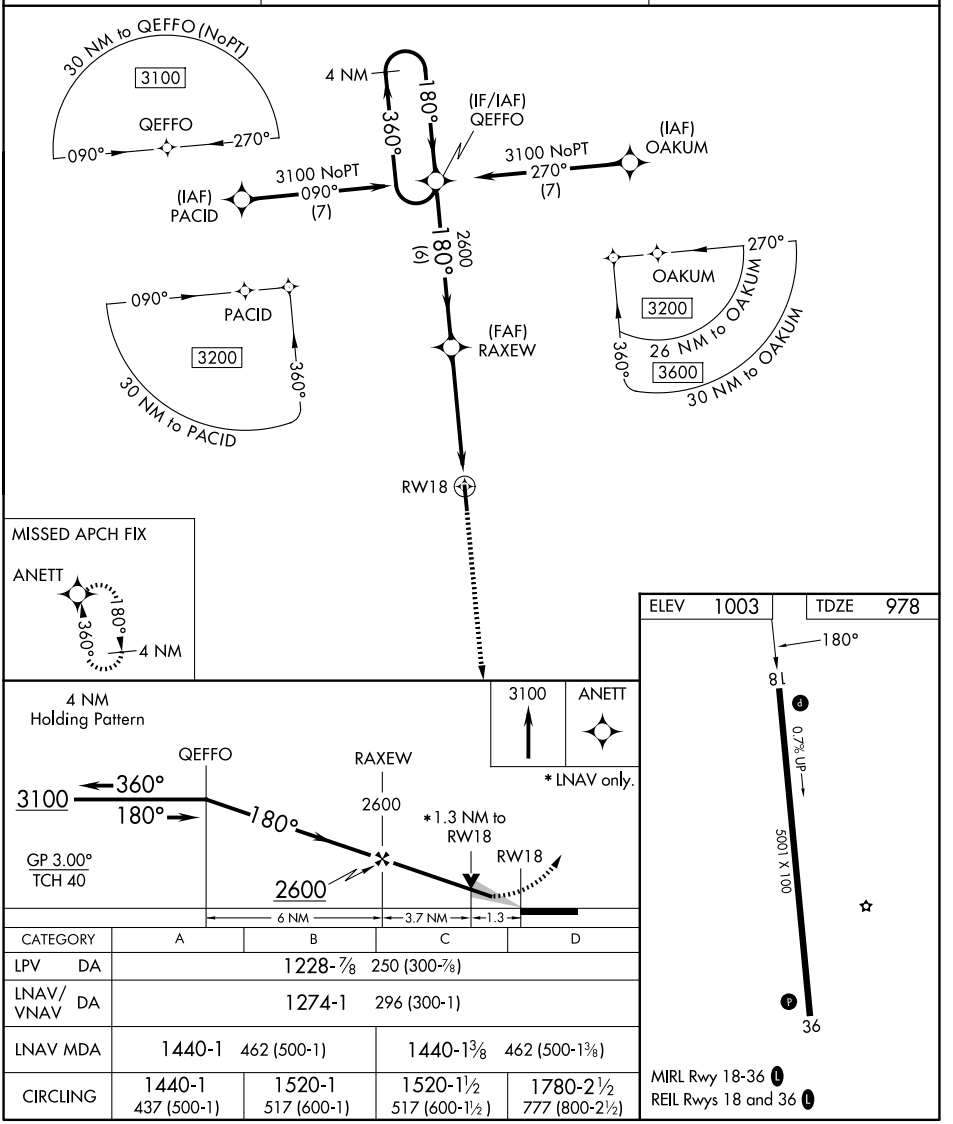

CATEGORY	A	B	C	D
LPV DA	1228-⅞ 250 (300-⅞)			
LNAV/VNAV DA	1274-1 296 (300-1)			
LNAV MDA	1440-1 462 (500-1)		1440-1⅜ 462 (500-1⅜)	
CIRCLING	1440-1 437 (500-1)	1520-1 517 (600-1)	1520-1½ 517 (600-1½)	1780-2½ 777 (800-2½)

MIRL Rwy 18-36 L
REIL Rwys 18 and 36 L

SE-1, 29 OCT 2026 to 26 NOV 2026
SE-1, 29 OCT 2026 to 26 NOV 2026