RNAV (GPS) RWY 3

PHOENIX GOODYEAR (GYR)

WAAS CH 42839 W03A	APP CRS 030°	Rwy Ldg 8500 TDZE 954 Apt Elev 969


RNP APCH.

NA when using Phoenix Sky Harbor Intl altimeter setting. When local altimeter setting not received, use Phoenix Sky Harbor Intl altimeter setting: increase all MDA 80 feet and visibility LP/LNAV Cat C/D and Circling Cat C ¼ SM.


Procedure NA at night. Helicopter visibility reduction below ¾ SM NA. VDP NA


MISSED APPROACH: Climb to 1900 then climbing left turn to 4000 direct TATUY and hold.

ATIS	LUKE APP CON ★	GOODYEAR TOWER ★	GND CON	UNICOM
118.35	125.45 263.125	120.1 (CTAF) 239.3	121.7	122.95

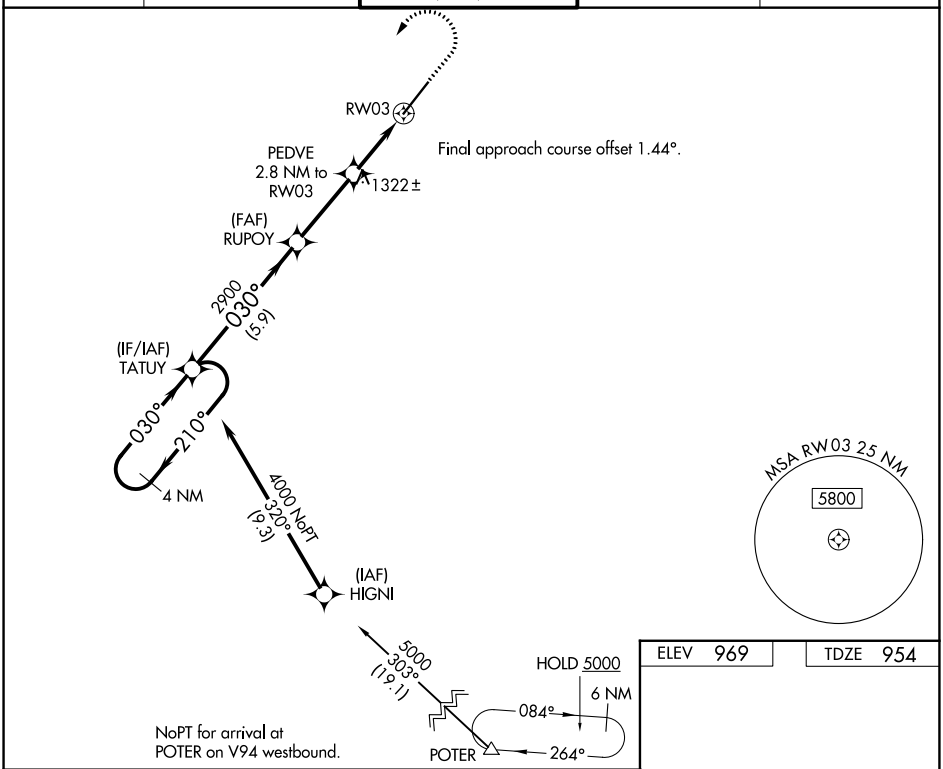

ELEV 969	TDZE 954

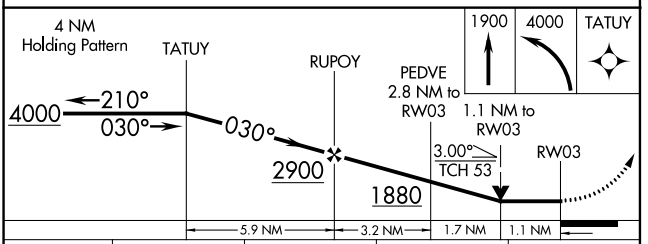



CATEGORY	A	B	C	D
LP MDA	1340-1 386 (400-1)		1340-1⅛ 386 (400-1⅛)	
LNAV MDA	1580-1 626 (700-1)		1580-1¾ 626 (700-1¾)	
CIRCLING	1580-1 611 (700-1)		1860-2¾ 891 (900-2¾)	1920-3 951 (1000-3)

REIL Rwys 3 and 21
MIRL Rwy 3-21

SW-4, 29 OCT 2026 to 26 NOV 2026
SW-4, 29 OCT 2026 to 26 NOV 2026