RNAV (GPS) RWY 1

LAFAYETTE MUNI (3M7)

WAAS	APP CRS	Rwy Ldg	5000
CH 57917	008°	TDZE	969
W01A		Apt Elev	969


RNP APCH - GPS.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 47°C. Obtain local altimeter setting on CTAF; when not received, use Bowling Green altimeter setting: increase LPV DA to 1441 feet and all visibilities ½ SM; increase LNAV/VNAV DA to 1585 feet and all visibilities ½ SM; increase all MDAs 140 feet and visibility LNAV Cat C and D ¼ SM and Circling Cat C and D ½ SM. VDP and Baro-VNAV NA when using Bowling Green altimeter setting. Rwy 1 helicopter visibility reduction below ¾ SM NA.

NA


MISSED APPROACH: Climb to 3000 direct OZESI and hold.

AWOS-3PT	NASHVILLE APP CON	UNICOM
120.85	118.4 360.7	122.8 (CTAF) L

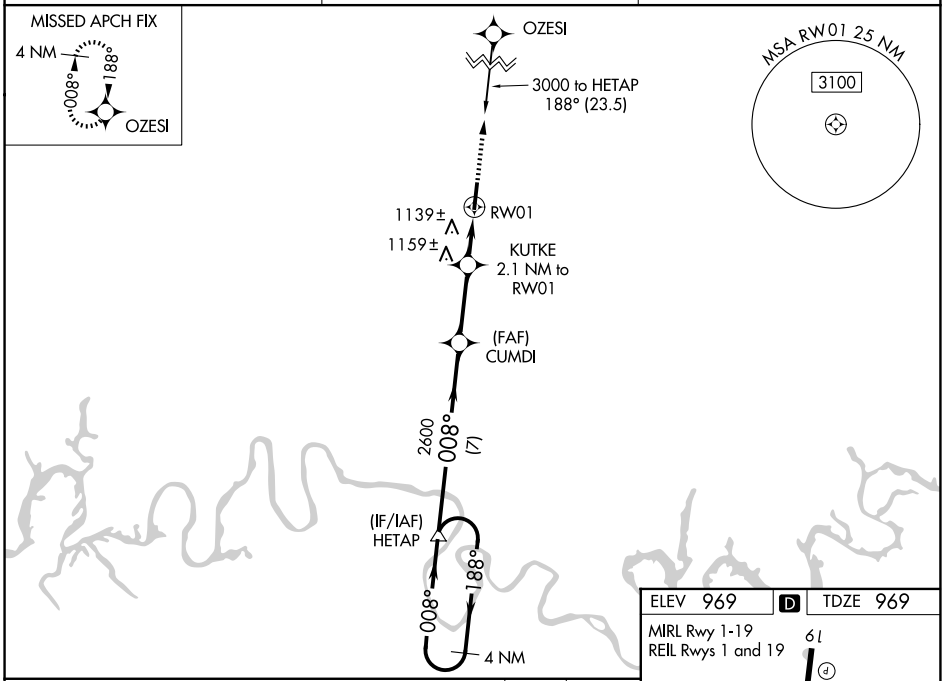

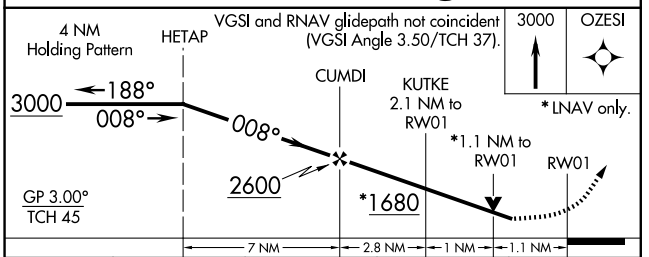

CATEGORY	A	B	C	D
LPV DA	1318-1¼ 349 (400-1¼)			
LNAV/VNAV DA	1452-1¾ 483 (500-1¾)			
LNAV MDA	1400-1 431 (500-1)		1400-1¼ 431 (500-1¼)	1400-1½ 431 (500-1½)
CIRCLING	1440-1 471 (500-1)		1600-1¾ 631 (700-1¾)	1700-2¼ 731 (800-2¼)

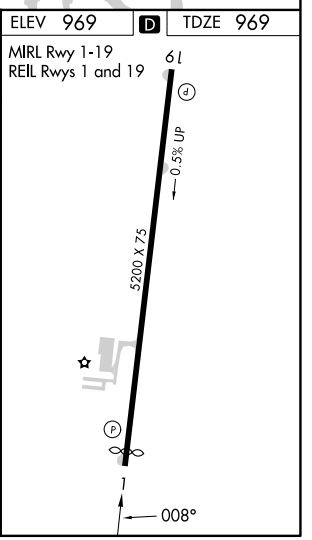

SE-1, 29 OCT 2026 to 26 NOV 2026
SE-1, 29 OCT 2026 to 26 NOV 2026