WAAS	APP CRS	Rwy Idg	3434
CH 69418	247°	TDZE	8
W25A		Apt Elev	9


RNAV (GPS) RWY 25
BEAUFORT EXEC (ARW)


ASR


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Beaufort MCAS (Merritt Fld) altimeter setting and increase LPV DA to 226, LNAV/VNAV DA to 352, and all MDA 20 feet. VDP and Baro-VNAV NA when using Beaufort MCAS (Merritt Fld) altimeter setting.

MISSED APPROACH: Climb to 2000 direct EROMY and hold.

AWOS-3	BEAUFORT APP CON★	UNICOM
119.675	125.125 292.125	122.7 (CTAF) L

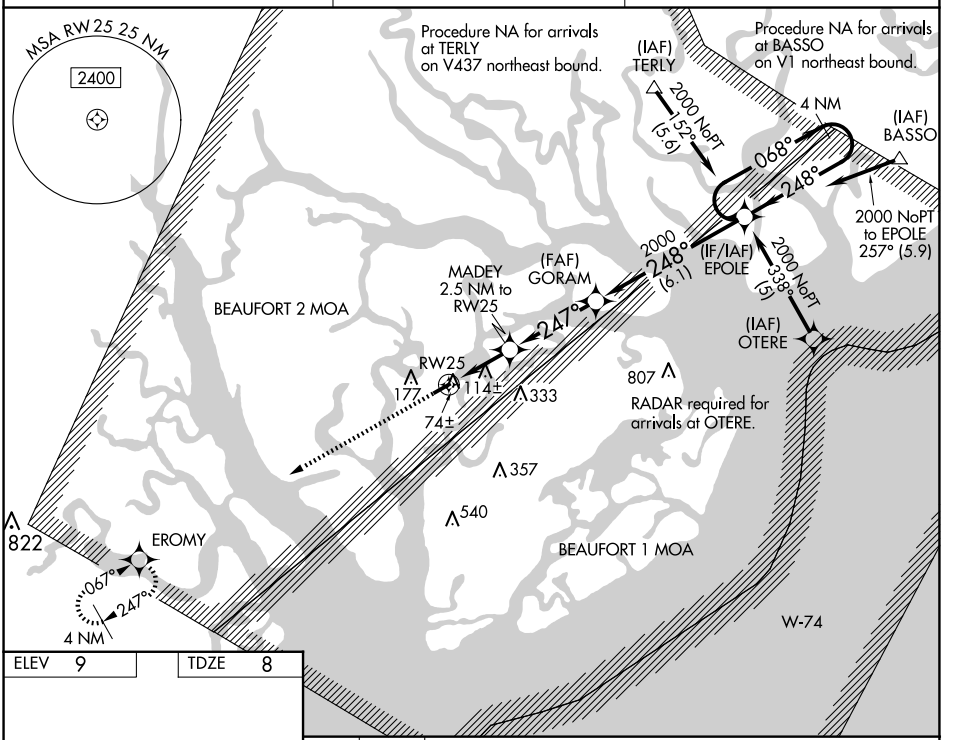



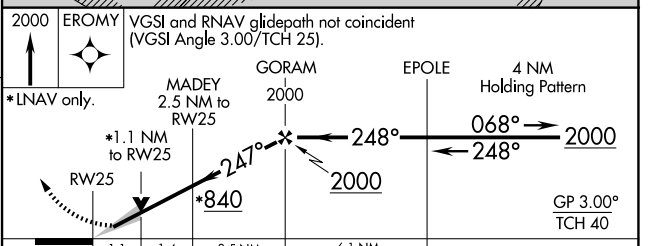

CATEGORY	A	B	C	D
LPV DA	208-1	200 (200-1)		NA
LNAV/VNAV DA	334-1¼	326 (400-1¼)		NA
LNAV MDA	380-1	372 (400-1)		NA
CIRCLING	480-1	471 (500-1)	640-1¾ 631 (700-1¾)	NA

REIL Rwy 25
MIRL Rwy 7-25 L

SE-2, 29 OCT 2026 to 26 NOV 2026
SE-2, 29 OCT 2026 to 26 NOV 2026