WAAS	APP CRS	Rwy Ldg	4399
CH 49031	139°	TDZE	1942
W13A		Apt Elev	1944


RNAV (GPS) RWY 13
MANDAN RGNL/LAWLER FLD (Y19)


V A ASR

Baro-VNAV NA when using Bismarck altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM not authorized. VDP NA when using Bismarck altimeter setting. When local altimeter setting not received, use Bismarck altimeter setting and increase all DA 54 feet and LPV all Cats visibility ¼ mile, LNAV/VNAV all Cats visibility ⅛ mile, increase all MDA 60 feet and LNAV Cat C/D and Circling Cat D visibility ¼ mile. Circling to Rwys 4 and 22 NA.


MISSED APPROACH: Climb to 4700 direct CEVEP and on track 174° to OHROR and hold.

AWOS-3	BISMARCK APP CON ★	UNICOM
118.225	126.3 298.9	122.8 (CTAF) L

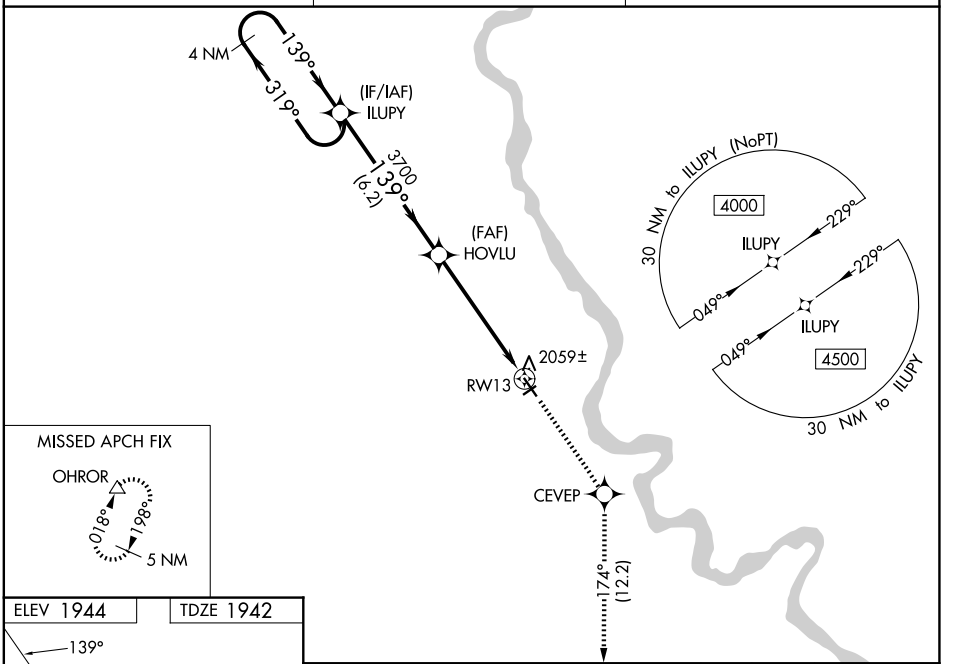

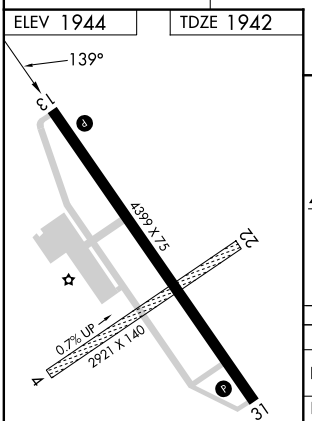

REIL Rwys 13 and 31 L
MIRL Rwys 13-31 and 4-22 L

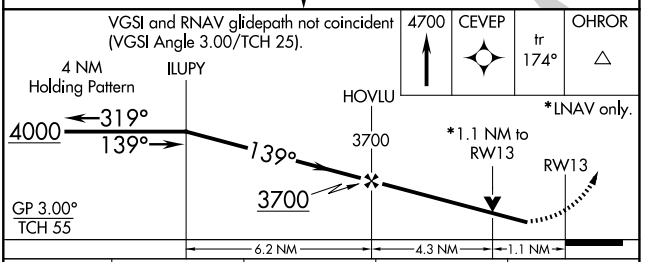

CATEGORY	A	B	C	D
LPV DA	2192-¾ 250 (300-¾)			
LNAV/VNAV DA	2244-1 302 (300-1)			
LNAV MDA	2320-1 378 (400-1)			
CIRCLING	2360-1 416 (500-1)	2460-1 516 (600-1)	2460-1½ 516 (600-1½)	2560-2 616 (700-2)

NC-1, 29 OCT 2026 to 26 NOV 2026
NC-1, 29 OCT 2026 to 26 NOV 2026