
WAAS	APP CRS	Rwy Ldg	5000
CH 78202	110°	TDZE	2537
W11A		Apt Elev	2537

RNAV (GPS) RWY 11
NAMPA MUNI (MAN)


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 54°C (130°F). When Circling to Rwy 29 at night, operational VGSI required, remain on or above VGSI glidepath until threshold. DME/DME RNP-0.3 NA. Rwy 11 helicopter visibiliy reduction below ¾ SM NA.

MISSED APPROACH: Climb to 5100 direct NEMEW and hold, continue climb-in-hold to 5100.


AWOS-3PT	BIG SKY APP CON	UNICOM
118.325	119.6 269.4	122.7 (CTAF) L

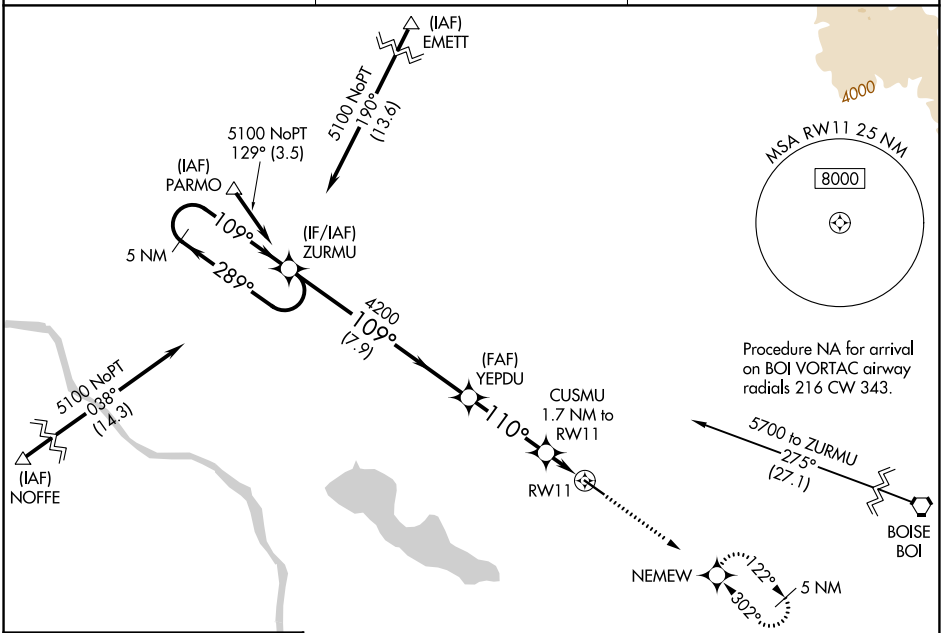

ELEV 2537	TDZE 2537



MIRL Rwy 11-29 L

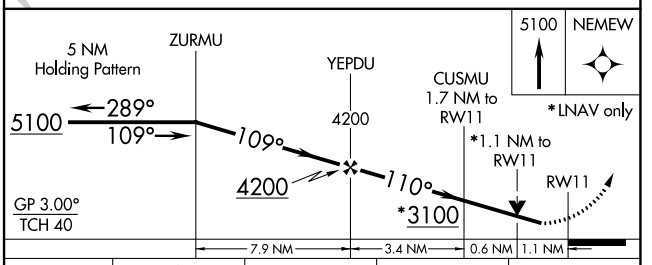

CATEGORY	A	B	C	D
LPV DA	2787-⅞ 250 (300-⅞)			
LNAV/VNAV DA	2851-1 314 (400-1)			
LNAV MDA	2920-1 383 (400-1)		2920-1⅛ 383 (400-1⅛)	
CIRCLING	3060-1 523 (600-1)		3100-1½ 563 (600-1½)	3220-2¼ 683 (700-2¼)

NW-1, 29 OCT 2026 to 26 NOV 2026
NW-1, 29 OCT 2026 to 26 NOV 2026