WAAS	APP CRS	Rwy Ldg	6500
CH 99503	270°	TDZE	17
W27A		Apt Elev	17

RNAV (GPS) RWY 27


GULF SHORES INTL/JACK EDWARDS FLD (JKA)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Pensacola Intl altimeter setting. Circling Rwy 17, 35 NA at night. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Pensacola Intl altimeter setting and increase LPV DA to 295 feet; increase LNAV/VNAV DA to 559 feet and all visibilities ¼ SM; increase all MDAs 80 feet and visibility Cats C and D ¼ SM. For inop ALS, increase LNAV Cat C/D visibility to 1⅛ SM . For inop ALS, when using Pensacola Intl altimeter setting minimums, increase LPV all Cats visibility to ⅞ SM, increase LNAV Cats C/D visibility to 1⅜ SM.


MALSR

MISSED APPROACH: Climb to 2500 direct VUSRY and hold.


ATIS	PENSACOLA APP CON	GULF SHORES TOWER ★	GND CON	UNICOM
134.525	120.65 270.8	118.65 (CTAF) L	121.7	122.7

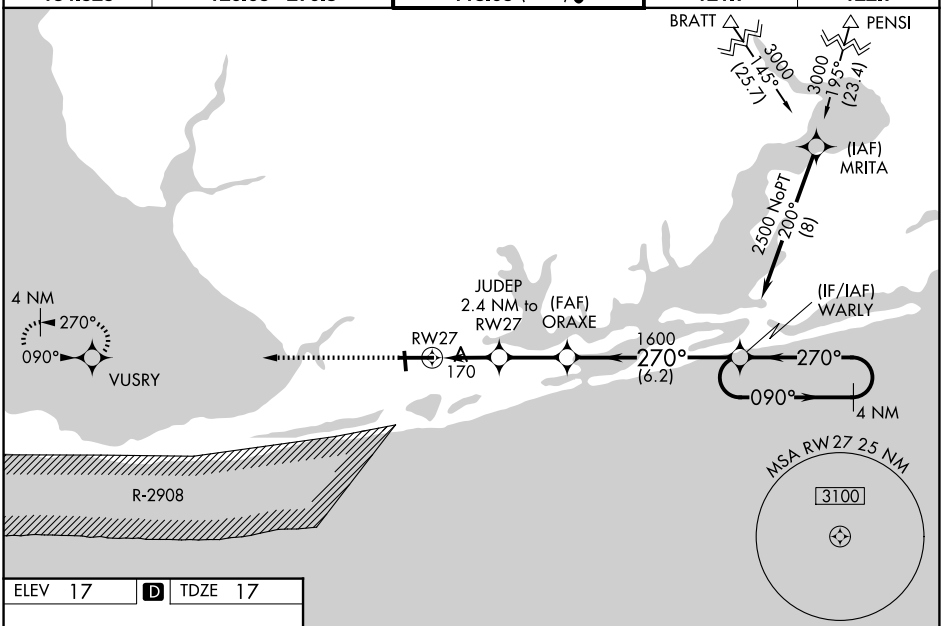

ELEV 17 | D | TDZE 17



MIRL Rwy 17-35 L
HIRL Rwy 9-27 L

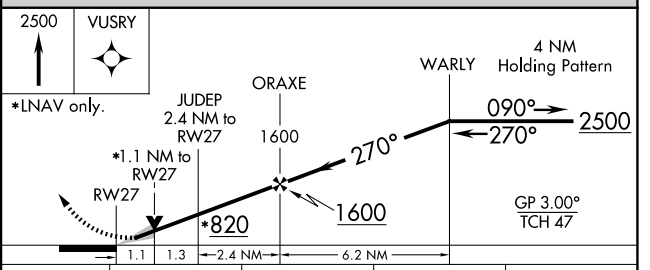

CATEGORY	A	B	C	D
LPV DA	217-½ 200 (200-½)			
LNAV/VNAV DA	481-1⅛ 464 (500-1⅛)			
LNAV MDA	420-½ 403 (500-½)		420-¾ 403 (500-¾)	
CIRCLING	480-1 463 (500-1)		740-2 723 (800-2)	740-2¼ 723 (800-2¼)

SE-4, 29 OCT 2026 to 26 NOV 2026
SE-4, 29 OCT 2026 to 26 NOV 2026