WAAS	APP CRS	Rwy Ldg	6500
CH 86503	090°	TDZE	16
W09A		Apt Elev	17

RNAV (GPS) RWY 9


GULF SHORES INTL/JACK EDWARDS FLD (JKA)


RNP APCH - GPS.

Baro-VNAV and VDP NA when using Pensacola Intl altimeter setting. Rwy 09 helicopter visibility reduction below ¾ SM NA. Circling Rwy 17, 35 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use Pensacola Intl altimeter setting and increase LPV DA to 388 feet and all visibilities ⅛ SM. Increase LNAV/VNAV DA to 394 feet and all visibilities ⅛ SM. Increase all MDAs 80 feet and LNAV visibility Cat C/D ¼ SM, and Circling visibility Cat C/D ¼ SM.


MISSED APPROACH: Climb to 2500 direct WARLY and hold.

ATIS	PENSACOLA APP CON	GULF SHORES TOWER★	GND CON	UNICOM
134.525	120.65 270.8	118.65 (CTAF) L	121.7	122.7

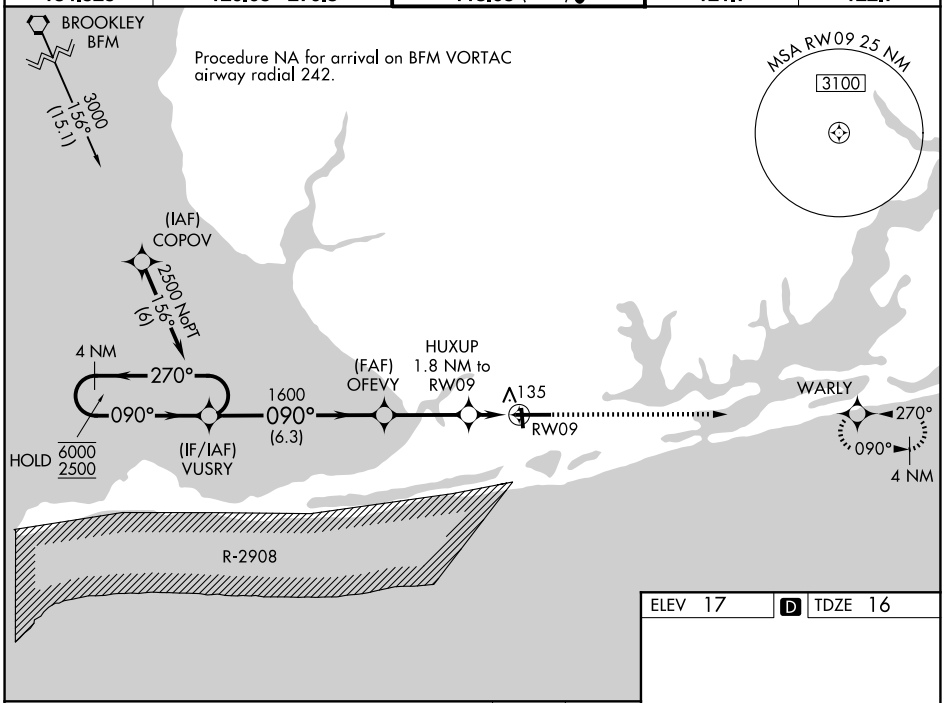

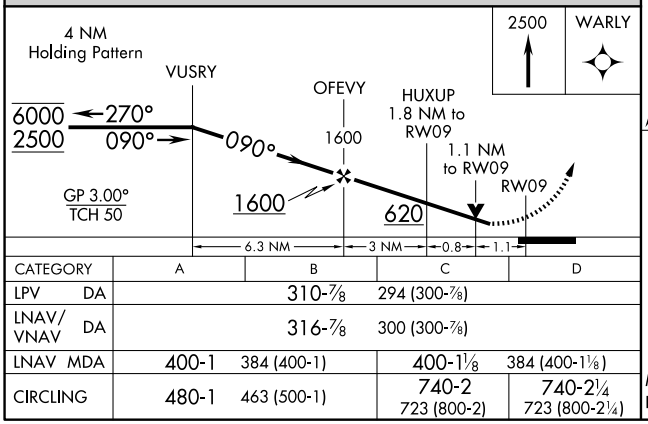

CATEGORY	A	B	C	D
LPV DA		310-⅞	294 (300-⅞)	
LNAV/VNAV DA		316-⅞	300 (300-⅞)	
LNAV MDA	400-1	384 (400-1)	400-1⅛	384 (400-1⅛)
CIRCLING	480-1	463 (500-1)	740-2 723 (800-2)	740-2¼ 723 (800-2¼)



SE-4, 29 OCT 2026 to 26 NOV 2026
SE-4, 29 OCT 2026 to 26 NOV 2026