WAAS CH 93809 W35A	APP CRS 352°	Rwy Ldg 8000 TDZE 5515 Apt Elev 5515

RNAV (GPS) RWY 35

COLORADO AIR AND SPACE PORT (CFO)


RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -25°C or above 46°C. For inop ALS, increase LNAV/VNAV all Cats visibility to ⅞ SM.


MALSR


MISSED APPROACH: Climb to 8000 direct CUDNI and on track 353° to PHLAT and hold.

ATIS	DENVER APP CON	SPACE PORT TOWER ★	GND CON	CLNC DEL	CLNC DEL	UNICOM
119.025	128.25 371.95	120.2 (CTAF) L	124.7	124.7	121.75 (When twr closed)	122.95

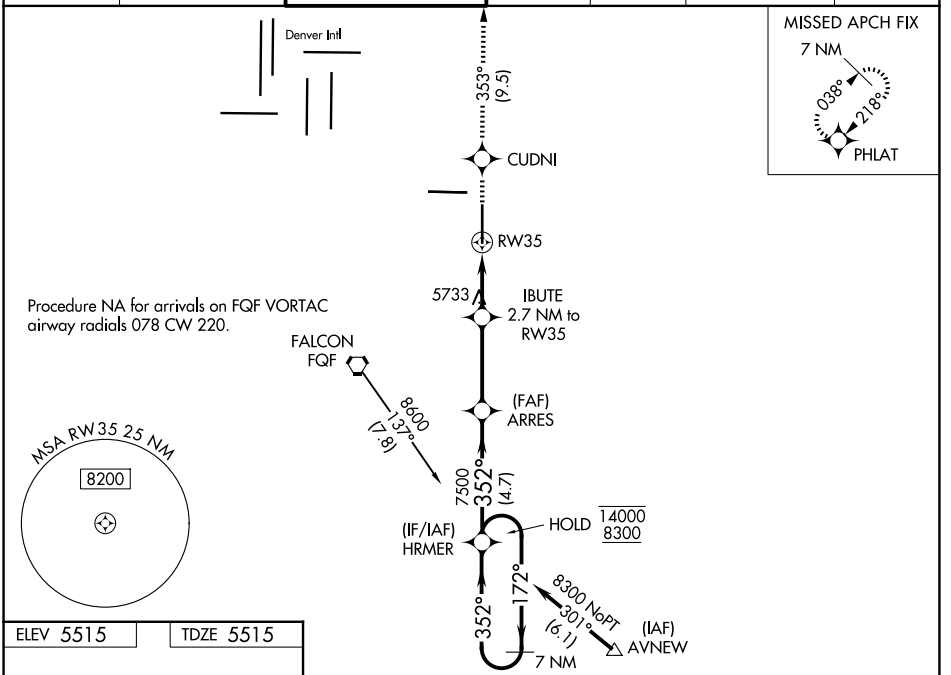

ELEV 5515	TDZE 5515

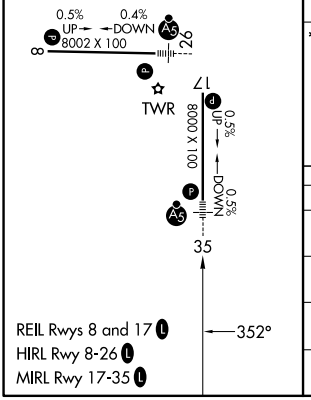

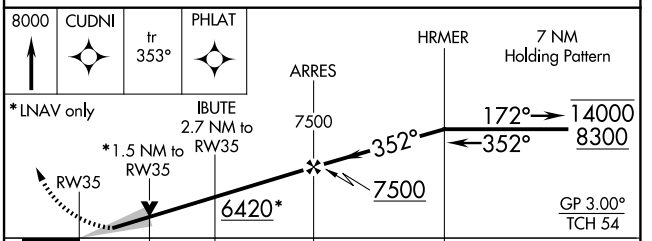

CATEGORY	A	B	C	D
LPV DA	5715-½ 200 (200-½)			
LNAV/VNAV DA	5783-½ 268 (300-½)			
LNAV MDA	6040-½ 525 (600-½)		6040-1 525 (600-1)	
CIRCLING	6040-1 525 (600-1)		6100-1½ 585 (600-1½)	6300-2½ 785 (800-2½)

SW-1, 29 OCT 2026 to 26 NOV 2026
SW-1, 29 OCT 2026 to 26 NOV 2026