WAAS	APP CRS	Rwy Ldg	7398
CH 42539	215°	TDZE	5817
W22A		Apt Elev	5837


RNAV (GPS) RWY 22
DOUBLE EAGLE II (AEG)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -26°C (-14°F) or above 46°C (114 °F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Albuquerque Intl Sunport altimeter setting and increase LPV DA to 6111, LNAV-VNAV DA to 6234, increase all MDA 100 feet, and increase LNAV/VNAV visibility all Cats and LNAV Cat C/D visibility ⅜ mile and Circling Cat C/D visibility ½ mile. For inop MALSR, increase LNAV/VNAV all Cats visibility to 1 mile. For inop MALSR when using Albuquerque Intl Sunport altimeter setting, increase LPV all Cats visibility to 1 mile and LNAV/VNAV all Cats and LNAV Cat C/D visibility to 1⅜ mile.


MALSR


MISSED APPROACH: Climb to 8800 direct YECUG and hold.

ATIS	ALBUQUERQUE APP CON	DOUBLE EAGLE II TOWER ★	GND CON
119.025	127.4 253.5	120.15 (CTAF) L	121.625

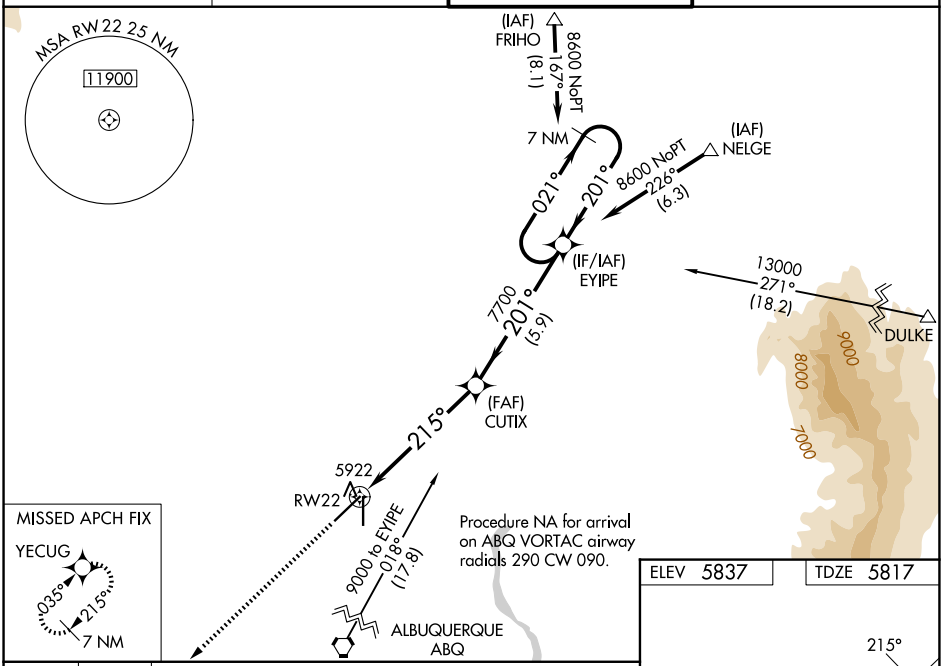

ELEV 5837 TDZE 5817

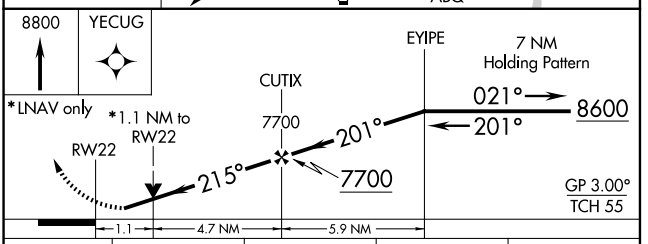

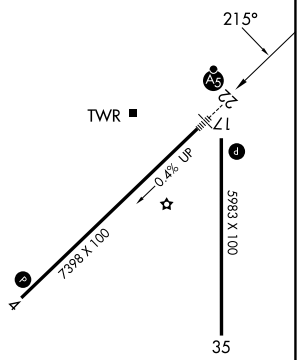

CATEGORY	A	B	C	D
LPV DA	6017-½ 200 (200-½)			
LNAV/VNAV DA	6140-⅝ 323 (400-⅝)			
LNAV MDA	6200-½ 383 (400-½)		6200-⅝ 383 (400-⅝)	
CIRCLING	6400-1 563 (600-1)		6420-1½ 583 (600-1½)	6640-2½ 803 (900-2½)

REIL Rwys 17 and 35 L
MIRL Rwys 4-22 and 17-35 L

SW-1, 29 OCT 2026 to 26 NOV 2026
SW-1, 29 OCT 2026 to 26 NOV 2026